

Vendor: Cisco

Exam Code: 642-359

Exam Name: Implementing Cisco Storage Network Solutions (ICSNS)

Version: DEMO

QUESTION 1

Which command would you use to determine if device aliases in VSAN 5 are configured for fabriC.wide distribution?

- A. show zoneset name alias vsan 5
- B. show cfs application name device-alias
- C. showfcalias distribution vsan 5
- D. show vsan 5 device-alias status

Answer: B

QUESTION 2

The MDS 9000 family switches use what three technologies to protect against unauthorized management access? (Choose three.)


- A. SNMPV3
- B. SSH
- C. RBAC
- D. RMON
- E. E. ses
- F. WEBM

Answer: ABC

QUESTION 3


Drag and Drop Question.

Drag the Cisco analysis tool on the left to its appropriate description on the right.

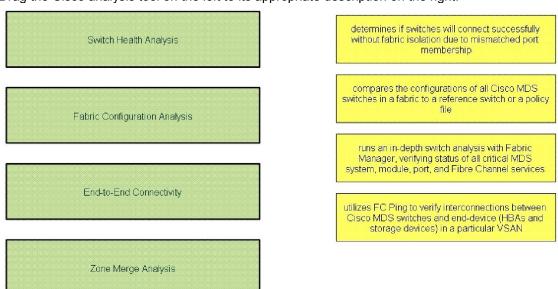


Drag and drop question. Drag the items to the proper locations.

Answer:

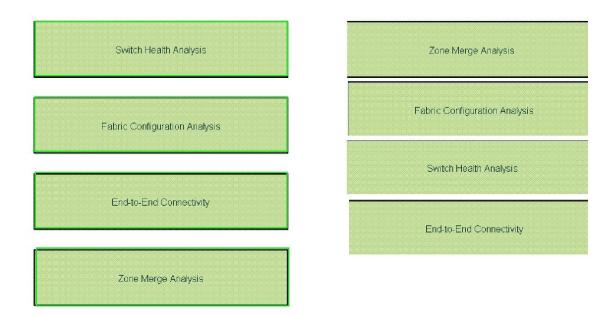

QUESTION 4

Refer to the exhibit. Which two options from the Tools menu would you select to verify connectivity and latency to a Fibre Channel end device? (Choose two.)

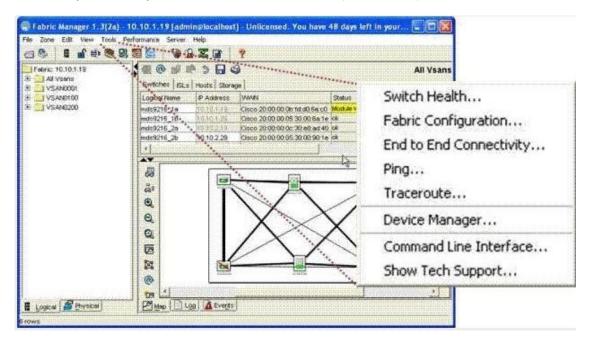

- A. Switch Health
- B. Fabric Configuration
- C. End to End Connectivity
- D. Ping
- E. Device Manager

Answer: CD

QUESTION 5

During initial switch configuration, the administrator elects to enable full zoneset distribution. What is the impact of this choice during zoneset activation?

- A. only the active zoneset is distributed to all switches in the fabric
- B. both the full zone database and active zoneset are distributed to all switches in the fabric
- C. both FCID and WWN information are distributed to all switches in the fabric
- D. only the full zone database is distributed to all switches in the fabric

Answer: B

QUESTION 6

Refer to the exhibit. What is the effect of enabling the VSAN scope with number 500 when creating the SalesUser role?



- A. The user would be excluded from VSAN 500.
- B. The user would be able to use allowed commands in VSAN 500 only.
- C. The user would be able to create VSAN from 1 to 500.
- D. The user connecting to the Fibre Channel fabric would be restricted to VSAN 500.

Answer: B

QUESTION 7


The system administrator receives the following message: "Error disabled - Possible port channel misconfiguration". What three things should the administrator verify in the PortChannel configuration? (Choose three.)

- A. Each switch on either side of the PortChannel is connected to the same number of interfaces.
- B. There are no more than 32 links aggregated together to form the PortChannel.
- C. Each ISL interface belongs to the same VSAN.
- D. Links in the PortChannel were not changed after the PortChannel was configured.

Answer: ACD

QUESTION 8

Refer to the exhibit. What is the effect of executing the commands shown in the exhibit?

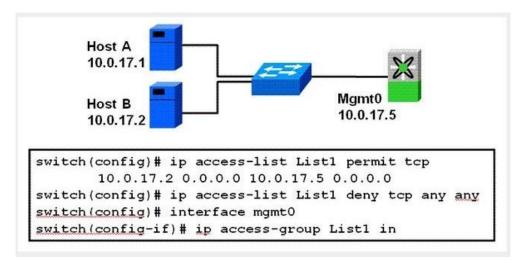

- A. Host A will not be able to communicate with interface mgmtO.
- B. Host B will not be able to communicate with interface mgmtO.
- C. All hosts will be able to communicate with interface mgmtO.
- D. No hosts will be able to communicate with interface mgmtO.

Answer: A

QUESTION 9

A host is unable to access the storage network after its HBA is replaced. Which of these switch configurations could be preventing access?

- A. port-based zoning
- B. port-mode security
- C. port security
- D. port VSAN membership

Answer: C

QUESTION 10

Which Cisco MDS feature can be used to notify an administrator or call center that a serious event has occurred in the fabric?

- A. Call Home
- B. syslog
- C. FLOGI
- D. SNMP
- E. SPAN

Answer: A

Ensurepass.com Members Features:

- 1. Verified Answers researched by industry experts.
- 2. Q&As are downloadable in PDF and VCE format.
- 3. 98% success Guarantee and Money Back Guarantee.
- 4. Free updates for 180 Days.

View list of All Exam provided:

http://www.ensurepass.com/certfications?index=A

To purchase Lifetime Full Access Membership click here:

http://www.ensurepass.com/user/register

Valid Discount Code for 2014: SFOH-FZA0-7Q2S

To purchase the HOT Exams:

Cisco		CompTIA		Oracle	<u>VMWare</u>	IBM
100-101	640-554	220-801	LX0-101	1Z0-051	VCAD510	C2170-011
200-120	640-802	220-802	N10-005	1Z0-052	<u>VCP510</u>	C2180-319
300-206	640-816	BR0-002	SG0-001	1Z0-053	<u>VCP550</u>	C4030-670
300-207	640-822	CAS-001	SG1-001	<u>1Z0-060</u>	VCAC510	C4040-221
300-208	640-864	CLO-001	SK0-002	<u>1Z0-474</u>	VCP5-DCV	RedHat
350-018	642-467	<u>ISS-001</u>	SK0-003	<u>1Z0-482</u>	VCP510PSE	EX200
352-001	642-813	JK0-010	SY0-101	<u>1Z0-485</u>		EX300
400-101	642-902	JK0-801	SY0-301	<u>1Z0-580</u>		
640-461	700-302			<u>1Z0-820</u>		

