

[Download Full Version 350-401 Exam Dumps \(Updated in Feb/2023\)](#)

```
Ⓐ access-list 100 permit tcp any any eq 22
access-list 100 deny tcp host 10.0.0.5 any eq 22
!
class-map match-all telnet_copp
match access-group 100
!
policy-map CoPP
class telnet_copp
police 8000
!
control-plane
service-policy input CoPP
!
```

```
Ⓑ !
access-list 100 deny tcp host 10.0.0.5 any eq 22
access-list 100 permit tcp any any eq 22
!
class-map match-all telnet_copp
match access-group 100
!
policy-map CoPP
class telnet_copp
drop
!
control-plane
service-policy input CoPP
!
```

A. 

```
access-list 100 permit tcp any any eq 22
access-list 100 deny tcp host 10.0.0.5 any eq 22
!
class-map match-all telnet_copp
match access-group 100
!
policy-map CoPP
class telnet_copp
police 8000
!
control-plane
service-policy input CoPP
!
```

B. 

```
!
access-list 100 deny tcp host 10.0.0.5 any eq 22
access-list 100 permit tcp any any eq 22
!
class-map match-all telnet_copp
match access-group 100
!
policy-map CoPP
class telnet_copp
drop
!
control-plane
service-policy input CoPP
!
```

C. 

```
!
access-list 100 permit tcp host 10.0.0.5 any eq 22
access-list 100 deny tcp any any eq 22
!
class-map match-all telnet_copp
match access-group 100
!
policy-map CoPP
class telnet_copp
drop
!
control-plane
service-policy input CoPP
!
```

```
D. !
access-list 100 permit tcp host 10.0.0.5 any eq 22
access-list 100 deny tcp any any eq 22
!
class-map match-all telnet_copp
match access-group 100
!
policy-map CoPP
class telnet_copp
police 8000
!
control-plane
service-policy input CoPP
!
```

**Correct Answer:** B

#### QUESTION 221

A network engineer configures BGP between R1 and R2. Both routers use BGP peer group CORP and are set up to use MD5 authentication. This message is logged to the console of router R1:

```
*May 5 39:85:86.070: %TCP-6-BADAUTH" Invalid MD5 digest from 10.10.10.1 (29832) to 10.120.10.1 (179) tebleid -0
```


Which two configurations allow a peering session to form between R1 and R2? (Choose two.)

- A. R1(config-router)#neighbor 10.10.10.1 peer-group CORP  
R1(config-router)#neighbor CORP password Cisco
- B. R2(config-router)#neighbor 10.120.10.1 peer-group CORP  
R2(config-router)#neighbor CORP password Cisco
- C. R2(config-router)#neighbor 10.10.10.1 peer-group CORP  
R2(config-router)#neighbor PEER password Cisco
- D. R1(config-router)#neighbor 10.120.10.1 peer-group CORP  
R1(config-router)#neighbor CORP password Cisco
- E. R2(config-router)#neighbor 10.10.10.1 peer-group CORP  
R2(config-router)#neighbor CORP password Cisco

**Correct Answer:** AB

#### QUESTION 222

Refer to the exhibit. Which configuration must be applied to R to enable R to reach the server at 172.16.0.1?

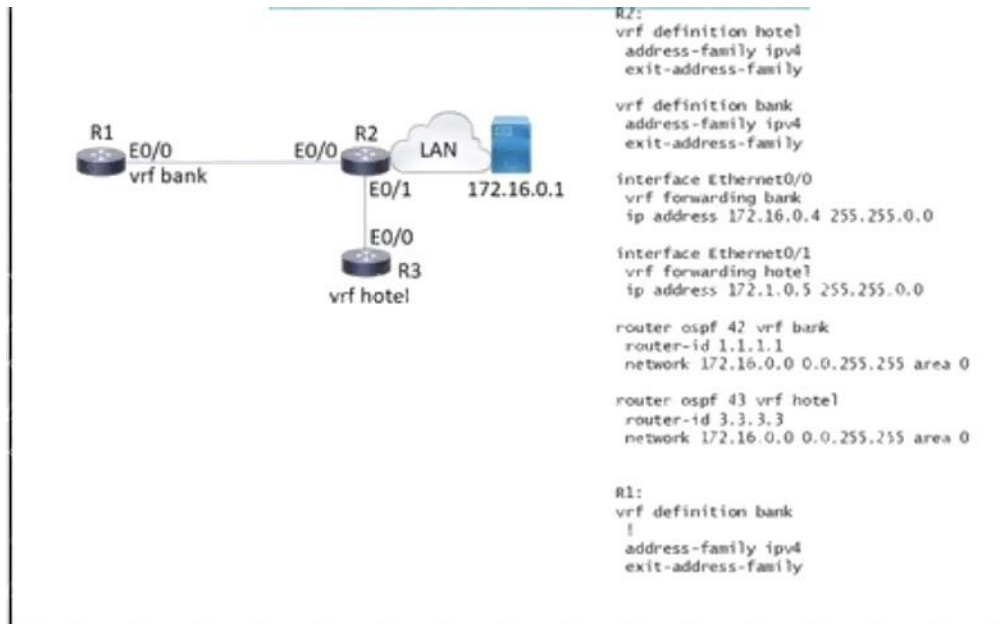

- A. 

```
interface Ethernet0/0
vrf forwarding hotel
ip address 172.16.0.7 255.255.0.0

router ospf 44 vrf Hotel
network 172.16.0.0 0.0.255.255 area 0
```
- B. 

```
interface Ethernet0/0
ip address 172.16.0.7 255.255.0.0

router ospf 44 vrf hotel
network 172.16.0.0 255.255.0.0
```
- C. 

```
interface Ethernet0/0
ip address 172.16.0.7 255.255.0.0

router ospf 44 vrf bank
network 172.16.0.0 255.255.0.0
```
- D. 

```
interface Ethernet0/0
vrf forwarding bank
ip address 172.16.0.7 255.255.0.0

router ospf 44 vrf bank
network 172.16.0.0 0.0.255.255 area 0
```

Correct Answer: D

### QUESTION 223

A network administrator has designed a network with two multilayer switches on the distribution layer, which act as default gateways for the end hosts. Which two technologies allow every end host in a VLAN to use both gateways? (Choose two)


- A. GLBP
- B. HSRP
- C. MHSRP
- D. VSS
- E. VRRP

**Correct Answer:** AC


**QUESTION 224**

DRAG DROP

Drag and drop the Cisco SD-Access solution areas from the left onto the protocols they use on the right.

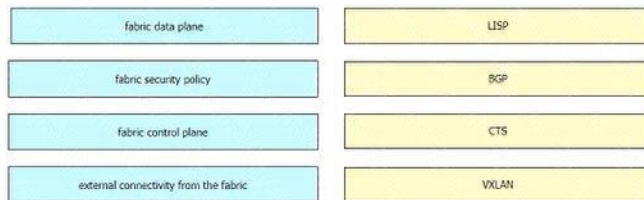

**Correct Answer:**

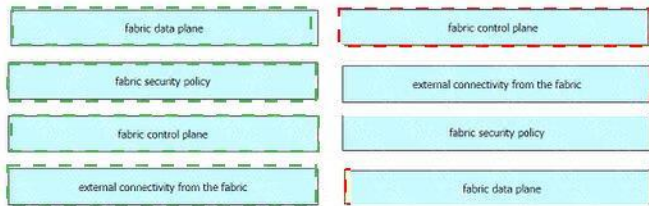

**QUESTION 225**

Which DHCP option helps lightweight APs find the IP address of a wireless LAN controller?

- A. Option 43
- B. Option 60
- C. Option 67
- D. Option 150

**Correct Answer:** A

**QUESTION 226**

Which devices does Cisco DNA Center configure when deploying an IP-based access control policy?

- A. All devices integrating with ISE
- B. selected individual devices
- C. all devices in selected sites
- D. all wired devices

**Correct Answer: C**

**Explanation:**

When you click Deploy, Cisco DNA Center requests the Cisco Identity Services Engine (Cisco ISE) to send notifications about the policy changes to the network devices.

**QUESTION 227**

**DRAG DROP**

Drag and drop the characteristics from the left onto the orchestration tools they describe on the right.

utilizes a pull model

utilizes a push model

multimaster architecture

primary/secondary architecture

Ansible

Puppet

**Correct Answer:**

utilizes a pull model

utilizes a push model

multimaster architecture

primary/secondary architecture

Ansible

utilizes a push model

multimaster architecture

Puppet

utilizes a pull model

primary/secondary architecture

**QUESTION 228**

Which function does a fabric wireless LAN controller perform In a Cisco SD-Access deployment?

- A. manages fabric-enabled APs and forwards client registration and roaming information to the Control Plane Node
- B. coordinates configuration of autonomous nonfabric access points within the fabric
- C. performs the assurance engine role for both wired and wireless clients
- D. is dedicated to onboard clients in fabric-enabled and nonfabric-enabled APs within the fabric

**Correct Answer: A**

**Explanation:**

Fabric Enabled WLC:

Fabric enabled WLC is integrated with LISP control plane. This WLC is responsible for AP image /Config, Radio Resource Management, Client Session management and roaming and all other wireless control plane functions.