

Vendor: Cisco

Exam Code: 642-732

Exam Name: Conducting Cisco Unified Wireless Site Survey

(CUWSS)

Version: Demo

An initial meeting has been scheduled for a proposed site survey of a customer headquarters location. Which four types of information would be valuable to collect prior to the formal kickoff meeting? (Choose four.)

- A. Site type (urban, suburban, external environmental sensitivity, etc.)
- B. Business type
- C. Number of years in business
- D. Number of customers
- E. Products and services produced
- F. Building type
- G. Plans for branch expansion
- H. Number of branch locations

Correct Answer: ABEF

QUESTION 2

The customer had a 802.11b/g WLAN site survey and installation two years ago with the final service performing as expected. Since that time, the customer has experienced modest customer growth while maintaining employee headcount. New wireless applications are being evaluated along with a possible temporary headcount increase, but the current WLAN performance has noticeable performance degradation. What is the most likely cause of the WLAN performance problems?

- A. They have added a second microwave to the break room.
- B. A new coffee shop with a wireless hotspot has opened across the street.
- C. The customer has expanded their shipping capacity by 50%.
- D. Employees are now using their smart phones and tablets in the office.

Correct Answer: D

QUESTION 3

You are working with a client that owns a six-story building in Charlotte, N.C.They occupy the bottom three floors, and currently have a wired LAN. They have contacted you to perform a WLAN site survey of their facility. Which three issues do you need to take into consideration before performing the site survey? (Choose three.)

- A. How many other organizations occupy the building?
- B. Does the customer facility have a multistory atrium or lobby?
- C. Protocol type required, client types in place, and client density?
- D. Is WLAN coverage required in the elevators?
- E. How many equipment closets do they have per floor and does the infrastructure all run back to a central location?
- F. How much signal bleedthrough is permissible between floors?
- G. How much WLAN experience does the customer IT staff have?

Correct Answer: BCD

You have been contacted by a medium-sized hospitality company that has 50 hotels. They would like to upgrade their existing WLAN in each hotel to 802.11n. While performing the site surveys for each hotel, what are the issues that you need to take into consideration when determining the locations for each AP?

- A. Selecting AP locations where power is already available
- B. Selecting APs that can be hidden in ceiling panels to provide a secure and clean aesthetic look
- C. Selecting locations that are easily accessed so maintenance and upgrades can be performed quickly
- D. Selecting locations that make visual assessment of the AP operation easy

Correct Answer: B

QUESTION 5

During the site survey kick-off meeting with your customer, they ask why you need to verify the existing network infrastructure. Which two reasons do you give them? (Choose two.)

- A. You need to verify the make, model, and software versions of all the equipment that will connect to the WLAN components in order to ensure compatibility.
- B. You need to verify that the equipment the WLAN components will connect to has sufficient memory capacity to support the additional WLAN connections.
- C. You need to verify that there are sufficient switch ports to support the new WLAN connections.
- D. You need to verify that the switches the WLAN components will connect to can supply 802.3af inline power, and that they have sufficient ports to support all the new WLAN devices.
- E. Depending on the type of APs that are planned for, the deployment may require different types of PoE to be supplied by the LAB switches.

Correct Answer: CD

QUESTION 6

After having the kick-off meeting for a new site survey project with your customer, which three factors need to be considered prior to beginning a WLAN site survey? (Choose three.)

- A. Will an additional trip to the facility to perform the initial walkthrough be required?
- B. How much time should be allocated to survey the locations for the controllers?
- C. Will any additional regulatory or safety training be required to complete the site survey?
- D. Is access available to all areas of the customer facility where the WLAN is planned to be deployed?
- E. Which types of controllers and switches will be required to fully conduct the site survey in all areas of the customer facility?
- F. Is access available to customer employees so that initial interviews can be performed?

Correct Answer: ACD

The customer has an existing 802.11b/g network with Cisco 2500 controllers. The customer would like to migrate to an 802.11a/b/g/n WLAN. Which network infrastructure issue might impact client performance in this proposed controller-based solution?

- A. The additional application load placed on servers by 802.11n clients.
- B. A bottleneck may occur if the access switch port to the AP only supports 100 Mb/s full duplex.
- C. The additional load placed on a RADIUS server by 802.1X authentication traffic on the first work day of each week.
- D. The added delay WDS imposes on the client when they roam from one AP to another.

Correct Answer: B

QUESTION 8

Which option allows the maximum 2.4-GHz channel usage for a survey and data deployment in the ETSI domain?

A. 1, 6, 11

B. 1, 5, 9, 13

C. 1, 6, 9, 14

D. 1, 6, 11, 14

Correct Answer: B

QUESTION 9

Which two issues do access and backhaul radios experience in mesh networks? (Choose two.)

- A. The access radio has to connect to two or several points.
- B. The access cell usually covers more area at ground level that may have more sources of reflection and interference.
- C. The access cell radio range is larger than the backhaul radio range, which causes the backhaul cell radio to suffer from more interference.
- D. Backhaul radios are a bottleneck for throughput.
- E. RAPs help MAPs avoid coverage holes.

Correct Answer: BD

QUESTION 10

What is the recommended method to protect a wireless outdoor bridge from lightning?

- A. Install the wireless outdoor bridge in a grounded NEMA enclosure.
- B. Install the wireless outdoor bridge inside a building if possible and only have the antenna outside.
- C. Install a fiber-optic link between the wireless outdoor bridge and the antenna.
- D. Install a one-meter segment of fiber-optic cable with a copper-to-fiber-optic transceiver to isolate the wireless outdoor bridge from the network cable plant.
- E. Install a protection frame in the copper portion of the network cable plant to act as a lighting arrestor.

Correct Answer: D

Which wireless tool would be most useful in planning a WLAN solution prior to performing a site survey?

- A. Ekahau Survey
- B. Air Magnet Survey
- C. Air Magnet Wi-Fi Analyzer
- D. Cisco Spectrum Expert
- E. Cisco WCS

Correct Answer: E

QUESTION 12

You have a multinational customer that would like you to perform a wireless site survey for a new manufacturing facility in Singapore. They have had a local vendor install a point-to-point wireless bridge link between two buildings 1 km apart. The ground between the buildings is flat but because facilities are in the mountains, dense fog is an issue. There are no line of sight issues between the buildings. The link is experiencing errors and throughput issues. Currently the two radios are set to operate at 2.4 GHz and the transmit power is set to 7 dBm with 7 dBm antennas. What do you need to take into consideration when performing the site survey for this link?

- A. Change the radio power to 17 dBm.
- B. Change the radio power to 20 dBm and replace with a 16 dBm antenna.
- C. Change the radio power to 29 dBm.
- D. Change the radio power to 13 dBm.

Correct Answer: D

QUESTION 13

When planning to perform a customer WLAN site survey, which three components and tasks should be considered? (Choose three.)

- A. Schedule a meeting with the customer to discuss the Statement of Work
- B. Complete the Pre-Survey Customer Questionnaire
- C. Schedule customer end user interviews
- D. Consider travel, access, and equipment requirements necessary to perform the site survey
- E. Schedule initial customer meeting and pre-survey walkthrough events
- F. Determine radio spectrum and channel allocation
- G. Determine AP and controller placement
- H. Determine customer training requirements

Correct Answer: BDE

QUESTION 14

Which three components and tasks should be considered while planning the site survey? (Choose three.)

- A. Determine the project scope, type of deployment, timeline, scale, budget, and users
- B. Determine project stakeholders
- C. Determine customer training requirements

- D. Determine AP and controller placement
- E. Determine the customer applications that the network will support
- F. Determine radio spectrum and channel allocation
- G. Schedule customer end user interviews

Correct Answer: ABE

QUESTION 15

Which three statements describe WLAN RF interaction with environmental situations? (Choose three.)

- A. Outdoor rain or indoor humidity affects diffraction.
- B. Outdoor rain or indoor humidity affects attenuation.
- C. RF frequency is inversely related to attenuation.
- D. RF frequency is directly related to attenuation.
- E. The human body affects diffusion.
- F. The human body affects attenuation.

Correct Answer: BDF

QUESTION 16


Which piece of information gathered during a WLAN site survey should be included in the customer report?

- A. Analysis of server location and applications supported.
- B. Analysis of fiber-optic backbone infrastructure.
- C. Output from Cisco WCS Location Quality Inspector.
- D. Output from Cisco WCS VoWLAN Voice Readiness Tool.
- E. Output from Cisco WCS Planning Mode Tool.

Correct Answer: E

QUESTION 17

Refer to the exhibit. Which type of cable connector is displayed that is used to connect antennas to transmitters?

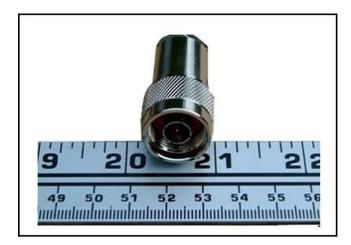

- A. RP-TNC
- B. N
- C. SMA
- D. SMB
- E. MMCX

Correct Answer: B

QUESTION 18

Which two basic characteristics would be needed from antennas used for survey and deployment in various indoor situations? (Choose two.)

- A. Horizontally polarized
- B. Vertically polarized
- C. Aesthetically fitting
- D. Least cost
- E. Highest gain
- F. Largest beamwidth

Correct Answer: BC

QUESTION 19

Which option will allow the maximum 2.4 GHz channel usage for a survey and voice deployment in the ETSI domain?

- A. 1, 6, 11
- B. 1, 5, 9, 13
- C. 1, 6, 9, 14
- D. 1, 6, 11, 14

Correct Answer: A

QUESTION 20

Given an AP that can transmit at 100 mW and the client at 40 mW, which power setting should be used for a site survey?

- A. 10 mW
- B. 20 mW
- C. 40 mW
- D. 60 mW
- E. 80 mW
- F. 100 mW

Correct Answer: B

EnsurePass.com Members Features:

- 1. Verified Answers researched by industry experts.
- 2. Q&As are downloadable in PDF and VCE format.
- 3. 98% success Guarantee and Money Back Guarantee.
- 4. Free updates for **180** Days.
- 5. Instant Access to download the Items

View list of All Exam provided:

http://www.ensurepass.com/certfications?index=A

To purchase Lifetime Full Access Membership click here: http://www.ensurepass.com/user/register

Valid Discount Code for 2015: JREH-G1A8-XHC6

To purchase the HOT Exams:

Cisco		CompTIA		Oracle	<u>VMWare</u>	IBM
100-101	640-554	220-801	LX0-101	1Z0-051	VCAD510	C2170-011
200-120	200-101	220-802	N10-005	1Z0-052	<u>VCP510</u>	C2180-319
300-206	640-911	BR0-002	SG0-001	<u>1Z0-053</u>	VCP550	C4030-670
300-207	640-916	CAS-001	SG1-001	1Z0-060	VCAC510	C4040-221
300-208	640-864	CLO-001	SK0-003	1Z0-474	VCP5-DCV	RedHat
350-018	642-467	<u>ISS-001</u>	SY0-301	<u>1Z0-482</u>	VCP510PSE	EX200
352-001	642-813	<u>JK0-010</u>	SY0-401	<u>1Z0-485</u>		EX300
400-101	642-832	<u>JK0-801</u>	PK0-003	<u>1Z0-580</u>		
640-461	642-902			1Z0-820		

