Name	Туре	Location	Resource group
RG1	Resource group	East US	Not applicable
RG2	Resource group	West US	Not applicable
Vault1	Recovery Services vault	West Europe	RG1
storage1	Storage account	East US	RG2
storage2	Storage account	West US	RG1
storage3	Storage account	West Europe	RG2
Analytics1	Log Analytics workspace	East US	RG1
Analytics2	Log Analytics workspace	West US	RG2
Analytics3	Log Analytics workspace	West Europe	RG1


You plan to configure Azure Backup reports for Vault1.

You are configuring the Diagnostics settings for the AzureBackupReports log.

Which storage accounts and which Log Analytics workspaces can you use for the Azure Backup reports of Vault1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

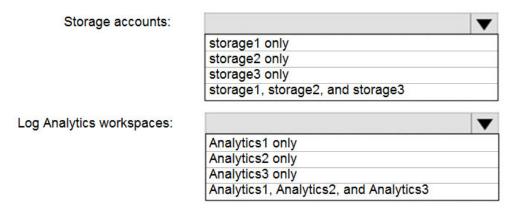

Correct Answer:

Answer Area

Storage accounts:

storage1 only
storage2 only
storage3 only
storage1, storage2, and storage3

Log Analytics workspaces:

Analytics1 only
Analytics2 only
Analytics3 only
Analytics1, Analytics2, and Analytics3

QUESTION 34

You have an Azure subscription that contains an Azure Active Directory (Azure AD) tenant named adatum.com. The tenant contains 500 user accounts.

You deploy Microsoft Office 365. You configure Office 365 to use the user accounts in adatum.com.

You configure 60 users to connect to mailboxes in Microsoft Exchange Online.

You need to ensure that the 60 users use Azure Multi-Factor Authentication (MFA) to connect to the Exchange Online mailboxes. The solution must only affect connections to the Exchange Online mailboxes.

What should you do?

- A. From the multi-factor authentication page, configure the Multi-Factor Auth status for each user
- B. From Azure Active Directory admin center, create a conditional access policy
- C. From the multi-factor authentication page, modify the verification options
- D. From the Azure Active Directory admin center, configure an authentication method

Correct Answer: A Explanation:

https://docs.microsoft.com/en-us/azure/active-directory/authentication/howto-mfa-userstates

QUESTION 35

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure Active Directory (Azure AD) tenant named Adatum and an Azure Subscription named Subscription1. Adatum contains a group named Developers. Subscription1 contains a resource group named Dev.

You need to provide the Developers group with the ability to create Azure logic apps in the Dev resource group.

Solution: On Dev, you assign the Logic App Contributor role to the Developers group.

Does this meet the goal?

A. Yes

B. No

Correct Answer: A Explanation:

The Logic App Contributor role lets you manage logic app, but not access to them. It provides access to view, edit, and update a logic app.

References:

https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles https://docs.microsoft.com/en-us/azure/logic-apps/logic-apps-securing-a-logic-app

QUESTION 36

You have a hybrid infrastructure that contains an Azure Active Directory (Azure AD) tenant named contoso.onmicrosoft.com. The tenant contains the users shown in the following table.

Name	User name	Туре	Source
User1	User1@contoso.onmicrosoft.com	Member	Azure Active Directory
User2	User2@contoso.onmicrosoft.com	Member	Windows Server AD
User3	User3@outlook.com	Guest	Microsoft Account
User4	User4@gmail.com	Guest	Microsoft Account

You plan to share a cloud resource to the All Users group.

You need to ensure that User1, User2, User3, and User4 can connect successfully to the cloud resource.

What should you do first?

- A. Create a user account of the member type for User4.
- B. Create a user account of the member type for User3.
- C. Modify the Directory-wide Groups settings.
- D. Modify the External collaboration settings.

Correct Answer: C **Explanation**:

Ensure that "Enable an 'All Users' group in the directory" policy is set to "Yes" in your Azure Active Directory (AD) settings in order to enable the "All Users" group for centralized access administration. This group represents the entire collection of the Active Directory users, including guests and external users, that you can use to make the access permissions easier to manage within your directory.

QUESTION 37

HOTSPOT

You have a virtual network named VNet1 that has the configuration shown in the following exhibit.

```
Name
ResourceGroupName : Production
                   : /subscriptions/14d26092-8e42-4ea7-b770-
9dcef70fb1ea/resourceGroups/Production/providers/Microsoft.Network/virtualNetworks/VNet1
Etag : W/"76f7edd6-d022-455b-aeae-376059318e5d"
ResourceGuid : 562696cc-b2ba-4cc5-9619-0a735d6c34c7
Tags
AddressSpace
                         "AddressPrefixes": [
DhcpOptions
Subnets
                          "Etag": "W/\ "76f7edd6-d022-455b-aeae-376059318e5d\"",
                           "Id": "/subscriptions/14d26092-8e42-4ea7-b770-
                           9dcef70fblea/resourceGroups/Production/providers/Microsoft.Network/
                           virtualNetworks/VNet1/subnets/default",
                           "AddressPrefix": "10.2.0.0/24",
VirtualNetworkPeerings : []
EnableDDoSProtection
EnableVmProtection
```

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Answer Area

Before a virtual machine on VNet1 can receive an IP address from 192.168.1.0/24, you must first

	-
add a network interface	
add a subnet	
add an address space	
delete a subnet	
delete an address space	


Before a virtual machine on VNet1 can receive an IP address from 10.2.1.0/24, you must first

	-
add a network interface	
add a subnet	
add an address space	
delete a subnet	
delete an address space	

Correct Answer:

Answer Area

Before a virtual machine on VNet1 can receive an IP address from 192.168.1.0/24, you must first



Before a virtual machine on VNet1 can receive an IP address from 10.2.1.0/24, you must first

	-
add a network interface	
add a subnet	
add an address space	
delete a subnet	
delete an address space	