Actions

Download and run the script to mount a drive on the local computer

Select a restore point that contains the deleted files

From the Azure portal, click **Restore VM** from the vault

From the Azure portal, click **File Recovery** from the vault

Mount a VHD

Copy the files by using AZCopy

Copy the files by using File Explorer

Answer Area

From the Azure portal, click **File Recovery** from the vault

Select a restore point that contains the deleted files

Download and run the script to mount a drive on the local computer

Copy the files by using AZCopy

QUESTION 74

You have an Azure subscription that contains the following users in an Azure Active Directory tenant named contoso.onmicrosoft.com:

Name	Role	Scope
User1	Global administrator	Azure Active Directory
User2	Global administrator	Azure Active Directory
User3	User administrator	Azure Active Directory
User4	Owner	Azure Subscription

User1 creates a new Azure Active Directory tenant named external.contoso.onmicrosoft.com.

You need to create new user accounts in external.contoso.com.onmicrosoft.com.

Solution: You instruct User2 to create the user accounts.

A. Yes
B. No

Correct Answer: A

Explanation:
Only a global administrator can add users to this tenant.

References:
https://docs.microsoft.com/en-us/azure/devops/organizations/accounts/add-users-to-azure-ad

QUESTION 75
Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription that contains the following resources:

▪ A virtual network that has a subnet named Subnet1
▪ Two network security groups (NSGs) named NSG-VM1 and NSG-Subnet1
▪ A virtual machine named VM1 that has the required Windows Server configurations to allow
   Remote Desktop connections

NSG-Subnet1 has the default inbound security rules only.

NSG-VM1 has the default inbound security rules and the following custom inbound security rule:

▪ Priority: 100
▪ Source: Any
▪ Source port range: *
▪ Destination: *
▪ Destination port range: 3389
▪ Protocol: UDP
▪ Action: Allow

VM1 connects to Subnet1. NSG1-VM1 is associated to the network interface of VM1. NSG-Subnet1 is associated to Subnet1.

You need to be able to establish Remote Desktop connections from the internet to VM1.

Solution: You modify the custom rule for NSG-VM1 to use the internet as a source and TCP as a protocol.

Does this meet the goal?

A. Yes
B. No

Correct Answer: B
Explanation:
NSGs deny all inbound traffic except from virtual network or load balancers. For inbound traffic, Azure processes the rules in a network security group associated to a subnet first, and then the rules in a network security group associated to the network interface.

By default NSG rule to allow traffic through RDP port 3389 is not created automatically during the creation of VM , unless you change the setting during creation. Subnets usually do not have any

NSG associated unless you go out of the way to do so, which this scenario does. when you create that extra NSG, it won't have an RDP rule by default, thus blocking inbound connections.

Request first goes to NSG -subnet1 and as there is no allow rule for RDP so it will block the request by default.Since the Subnet NSG (the one with the default rules) is evaluated first, it blocks the inbound RDP connection.

References:
https://docs.microsoft.com/en-us/azure/virtual-machines/troubleshooting/troubleshoot-rdp-connection
https://docs.microsoft.com/en-us/azure/virtual-network/security-overview#default-security-rules

QUESTION 76
HOTSPOT
You create a virtual machine scale set named Scale1. Scale1 is configured as shown in the following exhibit.

INSTANCES

* Instance count ❶	4 ✓
* Instance size (View full pricing details) ❶	DS1_v2 (1 vCPU, 3.5 GB) ⌄
Deploy as low priority ❶	No Yes
Use managed disks ❶	No **Yes**

+ Show advanced settings

AUTOSCALE

Autoscale ❶	Disabled **Enabled**
* Minimum number of VMs ❶	2 ✓
* Maximum number of VMs ❶	20 ✓

Scale out

* CPU threshold (%) ❶	80 ✓
* Number of VMs to increase by ❶	2 ✓

Scale in

* CPU threshold (%) ❶	30 ✓
* Number of VMs to decrease by ❶	4 ✓

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

If Scale1 is utilized at 85 percent for six minutes, Scale1 will be running [**answer choice**].

▼
2 virtual machines
4 virtual machines
6 virtual machines
10 virtual machines
20 virtual machines

If Scale1 is first utilized at 25 percent for six minutes, and then utilized at 50 percent for six minutes, Scale1 will be running [**answer choice**].

▼
2 virtual machines
4 virtual machines
6 virtual machines
10 virtual machines
20 virtual machines

Correct Answer:

If Scale1 is utilized at 85 percent for six minutes, Scale1 will be running [**answer choice**].

▼
2 virtual machines
4 virtual machines
6 virtual machines
10 virtual machines
20 virtual machines

If Scale1 is first utilized at 25 percent for six minutes, and then utilized at 50 percent for six minutes, Scale1 will be running [**answer choice**].

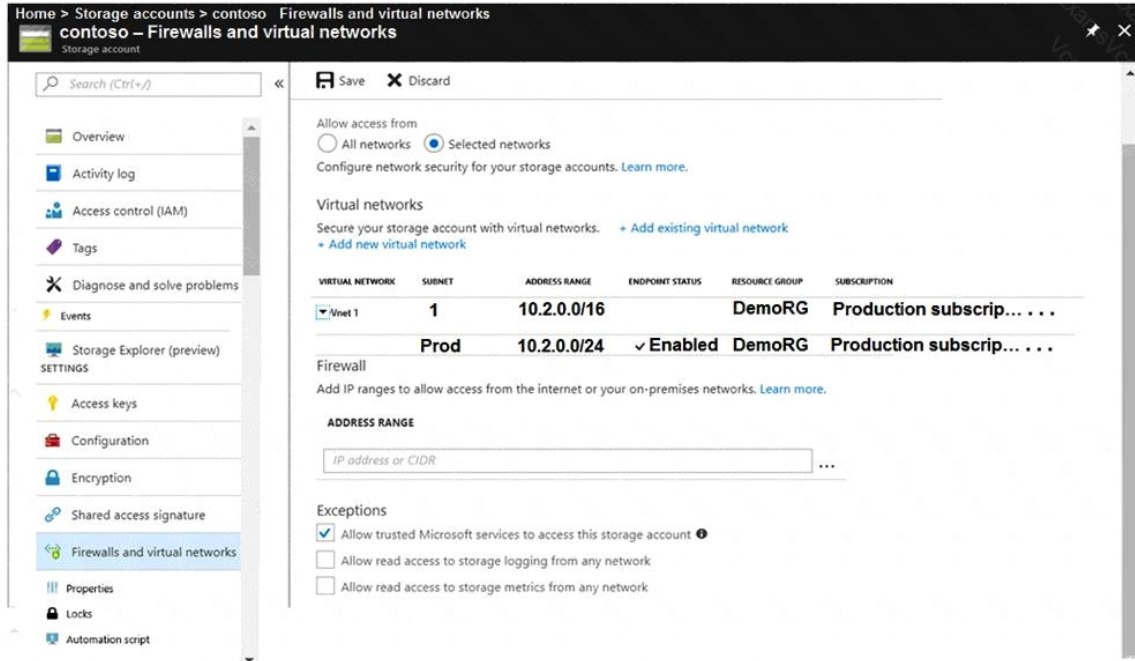| ▼ |
| --- |
| 2 virtual machines |
| 4 virtual machines |
| 6 virtual machines |
| 10 virtual machines |
| 20 virtual machines |

QUESTION 77
HOTSPOT
You have several Azure virtual machines on a virtual network named VNet1.

You configure an Azure Storage account as shown in the following exhibit.

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Answer Area

The virtual machines on the 10.2.9.0/24 subnet will have network connectivity to the file shares in the storage account **[answer choice]**.

▼
always
during a backup
never

Azure Backup will be able to back up the unmanaged hard disks of the virtual machines in the storage account **[answer choice].**

▼
always
during a backup
never

Correct Answer: