

Vendor: Cisco

Exam Code: 642-618

Exam Name: Deploying Cisco ASA Firewall Solutions (FIREWALL v2.0)

Version: Demo

On the Cisco ASA, tcp-map can be applied to a traffic class using which MPF CLI configuration command?

- A. inspect
- B. sysopt connection
- C. tcp-options
- D. parameters
- E. set connection advanced-options

Correct Answer: E

QUESTION 2

By default, which traffic can pass through a Cisco ASA that is operating in transparent mode without explicitly allowing it using an ACL?

- A. ARP
- B. BPDU
- C. CDP
- D. OSPF multicasts
- E. DHCP

Correct Answer: A

QUESTION 3

When enabling a Cisco ASA to send syslog messages to a syslog server, which syslog level will produce the most messages?

- A. notifications
- B. informational
- C. alerts
- D. emergencies
- E. errors
- F. debugging

Correct Answer: F

Refer to the exhibit. What can be determined about the connection status?

```
ASA-5510# show conn
54764 in use, 54764 most used
TCP outside 172.16.1.118:26093 inside 10.1.1.50:80, idle 0:00:23, bytes 0, flags aB
TCP outside 172.16.5.19:23598 inside 10.1.1.50:80, idle 0:00:13, bytes 0, flags aB
TCP outside 192.168.1.202:32729 inside 10.1.1.50:80, idle 0:00:25, bytes 0, flags aB
TCP outside 192.168.2.20:56481 inside 10.1.1.50:80, idle 0:00:29, bytes 0, flags ab
TCP outside 192.168.3.205:18073 inside 10.1.1.50:80, idle 0:00:02, bytes 0, flags aB
TCP outside 172.16.2.63:51503 inside 10.1.1.50:80, idle 0:00:03, bytes 0, flags aB TCP outside 172.16.18.60:47733 inside 10.1.1.50:80, idle 0:00:27, bytes 0, flags aB
TCP outside 192.168.1.202:20773 inside 10.1.1.50:80, idle 0:00:02, bytes 0, flags aB
TCP outside 192.168.4.192:23112 inside 10.1.1.50:80, idle 0:00:06, bytes 0, flags aB
TCP outside 172.16.25.60:47733 inside 10.1.1.50:80, idle 0:00:27, bytes 0, flags aB
!<output omitted>
Flags: A - awaiting inside ACK to SYN, a - awaiting outside ACK to SYN,
   B - initial SYN from outside, b - TCP state-bypass or nailed, C - CTIQBE media,
   D - DNS, d - dump, E - outside back connection, F - outside FIN, f - inside FIN,
   G - group, g - MGCP, H - H.323, h - H.225.0, 1 - inbound data,
   i - incomplete, J - GTP, j - GTP data, K - GTP t3-response
   k - Skinny media, M - SMTP data, m - SIP media, n - GUP
   O - outbound data, P - inside back connection, p - Phone-proxy TFTP connection,
   q - SQL*Net data, R - outside acknowledged FIN,
   R - UDP SUNRPC, r - inside acknowledged FIN, S - awaiting inside SYN,
   s - awaiting outside SYN, T - SIP, t - SIP transient, U - up,
   V - VPN orphan, W - WAAS,
   X - inspected by service module
```

- A. The output is showing normal activity to the inside 10.1.1.50 web server.
- B. Many HTTP connections to the 10.1.1.50 web server have successfully completed the three-way TCP handshake.
- C. Many embryonic connections are made from random sources to the 10.1.1.50 web server.
- D. The 10.1.1.50 host is triggering SYN flood attacks against random hosts on the outside.
- E. The 10.1.1.50 web server is terminating all the incoming HTTP connections.

Correct Answer: C


QUESTION 5

What mechanism is used on the Cisco ASA to map IP addresses to domain names that are contained in the botnet traffic filter dynamic database or local blacklist?

- A. HTTP inspection
- B. DNS inspection and snooping
- C. WebACL
- D. dynamic botnet database fetches (updates)
- E. static blacklist
- F. static whitelist

Correct Answer: B

Refer to the exhibit. Which statement about the policy map named test is true?




- A. Only HTTP inspection will be applied to the TCP port 21 traffic.
- B. Only FTP inspection will be applied to the TCP port 21 traffic.
- C. Both HTTP and FTP inspections will be applied to the TCP port 21 traffic.
- D. No inspection will be applied to the TCP port 21 traffic, because the http class map configuration conflicts with the ftp class map.
- E. All FTP traffic will be denied, because the FTP traffic will fail the HTTP inspection.

Correct Answer: B

QUESTION 7

Refer to the exhibit. Which Cisco ASA feature can be configured using this Cisco ASDM screen?

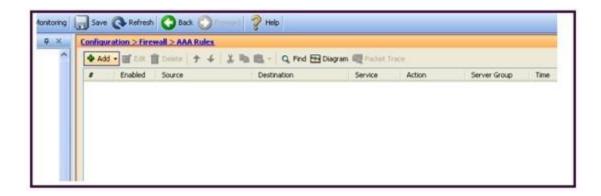

- A. Cisco ASA command authorization using TACACS+
- B. AAA accounting to track serial, ssh, and telnet connections to the Cisco ASA
- C. Exec Shell access authorization using AAA
- D. cut-thru proxy
- E. AAA authentication policy for Cisco ASDM access

Correct Answer: D

Refer to the exhibit. Which command enables the stateful failover option?

failover
failover lan unit primary
failover lan interface MYFAILOVER GigabitEthernet0/2
failover interface ip MYFAILOVER 172.16.5.1 255.255.255.0 standby 172.16.5.10
failoverlink MYFAILOVER GigabitEthernet0/2
failover key cisco123
failover group 1
primary
preempt
failover group 2
secondary
preempt

- A. failover link MYFAILOVER GigabitEthernet0/2
- B. failover lan interface MYFAILOVER GigabitEthernet0/2
- C. failover interface ip MYFAILOVER 172.16.5.1 255.255.255.0 standby 172.16.5.10
- D. preempt
- E. failover group 1 primary
- F. failover lan unit primary

Correct Answer: A

QUESTION 9

In which type of environment is the Cisco ASA MPF set connection advanced-options tcp-state-bypass option the most useful?

- A. SIP proxy
- B. WCCP
- C. BGP peering through the Cisco ASA
- D. asymmetric traffic flow
- E. transparent firewall

Correct Answer: D

Refer to the exhibit. Which statement about the MPF configuration is true?

class-map type inspect ftp match-all ftp-cmd match request-command put policy-map type inspect ftp ftp-insp class ftp-cmd reset access-list ftp-acl extended permit tcp any any eq ftp class-map ftp-cm match access-list ftp-acl policy-map ftp-pm class ftp-cm inspect ftp strict ftp-insp service-policy ftp-pm interface outside

- A. Any non-RFC complaint FTP traffic will go through additional deep FTP packet inspections.
- B. FTP traffic must conform to the FTP RFC, and the FTP connection will be dropped if the PUT command is used.
- C. Deep FTP packet inspections will be performed on all TCP inbound and outbound traffic on the outside interface.
- D. The ftp-pm policy-map type should be type inspect.
- E. Due to a configuration error, all FTP connections through the outside interface will not be permitted.

Correct Answer: B

Refer to the exhibit. What is a reasonable conclusion?

ASA# show local-host 10.1.1.99 Interface inside: 250 active, 250 maximum active, 0 denied localhost: <10.1.1.99>. TCP connection count/limit = 146608/unlimited TCP embryonic count = 146606 UDP connection count/limit = 0/unlimited Xlate(s): Global 209.165.201.21 Local 10.1.1.99 Conn(s): TCP out 10.101.32.157:135 in 10.1.1.99:34580 idle 0:01:43 Bytes 0 flags saA TCP out 10.103.108.191:135 in 10.1.1.99:8688 idle 0:01:43 Bytes 0 flags saA TCP out 10.100.205.160:135 in 10.1.1.99:7774 idle 0:01:43 Bytes 0 flags saA TCP out 10.101.182.19:135 in 10.1.1.99:39193 idle 0:01:43 Bytes 0 flags saA TCP out 10.102.218.45:135 in 10.1.1.99:16462 idle 0:01:43 Bytes 0 flags saA TCP out 10.100.21.120:135 in 10.1.1.99:30322 idle 0:01:43 Bytes 0 flags saA TCP out 10.101.25.195:135 in 10.1.1.99:41116 idle 0:01:43 Bytes 0 flags saA TCP out 10.103.17.219:135 in 10.1.1.99:59163 idle 0:01:43 Bytes 0 flags saA TCP out 10.102.201.141:135 in 10.1.1.99:2978 idle 0:01:43 Bytes 0 flags saA ! <output omitted>

- A. The maximum number of TCP connections that the 10.1.1.99 host can establish will be 146608.
- B. All the connections from the 10.1.1.99 have completed the TCP three-way handshake.
- C. The 10.1.1.99 hosts are generating a vast number of outgoing connections, probably due to a virus.
- D. The 10.1.1.99 host on the inside is under a SYN flood attack.
- E. The 10.1.1.99 host operations on the inside look normal.

Correct Answer: C

QUESTION 12

By default, how does the Cisco ASA authenticate itself to the Cisco ASDM users?

- A. The administrator validates the Cisco ASA by examining the factory built-in identity certificate thumbprint of the Cisco ASA.
- B. The Cisco ASA automatically creates and uses a persistent self-signed X.509 certificate to authenticate itself to the administrator.
- C. The Cisco ASA automatically creates a self-signed X.509 certificate on each reboot to authenticate itself to the administrator.
- D. The Cisco ASA and the administrator use a mutual password to authenticate each other.
- E. The Cisco ASA authenticates itself to the administrator using a one-time password.

Correct Answer: C

QUESTION 13

When will a Cisco ASA that is operating in transparent firewall mode perform a routing table lookup instead of a MAC address table lookup to determine the outgoing interface of a packet?

- A. if multiple context mode is configured
- B. if the destination MAC address is unknown
- C. if the destination is more than a hop away from the Cisco ASA
- D. if NAT is configured
- E. if dynamic ARP inspection is configured

Correct Answer: D

QUESTION 14

Which flag not shown in the output of the show conn command is used to indicate that an initial SYN packet is from the outside (lower security-level interface)?

ASA5520# show conn 29 in use, 63 most used TCP out 10.10.49.10:23 in 10.1.1.15:1026 idle 0:00:22 bytes 1774 flags UIO <output omitted>

- Α. Β
- B. D
- C. b
- D. A
- E. a
- F. i
- G. I
- Η. Ο

Correct Answer: A

QUESTION 15

Which statement about the default ACL logging behavior of the Cisco ASA is true?

- A. The Cisco ASA generates system message 106023 for each denied packet when a deny ACE is configured.
- B. The Cisco ASA generates system message 106023 for each packet that matched an ACE.

- C. The Cisco ASA generates system message 106100 only for the first packet that matched an ACE.
- D. The Cisco ASA generates system message 106100 for each packet that matched an ACE.
- E. No ACL logging is enabled by default.

Correct Answer: A

QUESTION 16

Which Cisco ASA feature enables the ASA to do these two things?

- 1. Act as a proxy for the server and generate a SYN-ACK response to the client SYN request.
- 2. When the Cisco ASA receives an ACK back from the client, the Cisco ASA authenticates the client and allows the connection to the server.
- A. TCP normalizer
- B. TCP state bypass
- C. TCP intercept
- D. basic threat detection
- E. advanced threat detection
- F. botnet traffic filter

Correct Answer: C

QUESTION 17

Which option is not supported when the Cisco ASA is operating in transparent mode and also is using multiple security contexts?

- A. NAT
- B. shared interface
- C. security context resource management
- D. Layer 7 inspections
- E. failover

Correct Answer: B

Refer to the exhibit. What does the * next to the CTX security context indicate?

Context Name admin	Class default	Interfaces GigabitEthernet0/0,	URL disk0:/admin.cfg
*CTX	default	GigabitEthernetO/1 GigabitEthernetO/0, GigabitEthernetO/2	disk0:/CTX.cfg
Total active Security	Contexts: 2		

- A. The CTX context is the active context on the Cisco ASA.
- B. The CTX context is the standby context on the Cisco ASA.
- C. The CTX context contains the system configurations.
- D. The CTX context has the admin role.

Correct Answer: D

QUESTION 19

Which Cisco ASA feature is implemented by the ip verify reverse-path interface interface_name command?

- A. uRPF
- B. TCP intercept
- C. botnet traffic filter
- D. scanning threat detection
- E. IPS (IP audit)

Correct Answer: A

QUESTION 20

In one custom dynamic application, the inside client connects to an outside server using TCP port 4444 and negotiates return client traffic in the port range of 5000 to 5500. The server then starts streaming UDP data to the client on the negotiated port in the specified range. Which Cisco ASA feature or command supports this custom dynamic application?

- A. TCP normalizer
- B. TCP intercept
- C. ip verify command
- D. established command
- E. tcp-map and tcp-options commands
- F. set connection advanced-options command

Correct Answer: D

EnsurePass.com Members Features:

- 1. Verified Answers researched by industry experts.
- 2. Q&As are downloadable in PDF and VCE format.
- 3. 98% success Guarantee and Money Back Guarantee.
- 4. Free updates for **180** Days.
- 5. Instant Access to download the Items

View list of All Exam provided: http://www.ensurepass.com/certfications?index=A

To purchase Lifetime Full Access Membership click here: http://www.ensurepass.com/user/register

Valid Discount Code for 2015: JREH-G1A8-XHC6

To purchase the HOT Exams:

Cis	<u>600</u>	Com	npTIA	Oracle	VMWare	IBM
<u>100-101</u>	<u>640-554</u>	<u>220-801</u>	<u>LX0-101</u>	<u>1Z0-051</u>	VCAD510	<u>C2170-011</u>
200-120	<u>200-101</u>	220-802	<u>N10-005</u>	<u>1Z0-052</u>	<u>VCP510</u>	<u>C2180-319</u>
<u>300-206</u>	<u>640-911</u>	BR0-002	<u>SG0-001</u>	<u>1Z0-053</u>	<u>VCP550</u>	<u>C4030-670</u>
<u>300-207</u>	<u>640-916</u>	<u>CAS-001</u>	<u>SG1-001</u>	<u>1Z0-060</u>	VCAC510	<u>C4040-221</u>
<u>300-208</u>	<u>640-864</u>	<u>CLO-001</u>	<u>SK0-003</u>	<u>1Z0-474</u>	VCP5-DCV	<u>RedHat</u>
<u>350-018</u>	<u>642-467</u>	<u>ISS-001</u>	<u>SY0-301</u>	<u>1Z0-482</u>	VCP510PSE	<u>EX200</u>
<u>352-001</u>	<u>642-813</u>	<u>JK0-010</u>	<u>SY0-401</u>	<u>1Z0-485</u>		<u>EX300</u>
<u>400-101</u>	<u>642-832</u>	<u>JK0-801</u>	<u>PK0-003</u>	<u>1Z0-580</u>		
<u>640-461</u>	<u>642-902</u>			<u>1Z0-820</u>		



Guaranteed Success with EnsurePass VCE Software & PDF File