



# **VMware**

## **Exam 2V0-621**

**VMware Certified Professional 6 – Data Center Virtualization Beta**

Version: 7.0

**[ Total Questions: 242 ]**

**Question No : 1**


Which condition would cause a vCenter Server installation to fail when installing on a Windows virtual machine?

- A. The virtual machine does not have at least four vCPUs.
- B. The virtual machine is running Windows Server 2008.
- C. The virtual machine has an E1000 network device.
- D. The virtual machine does not have 16GB of RAM.

**Answer: B**

**Question No : 2**


Refer to the Exhibit.

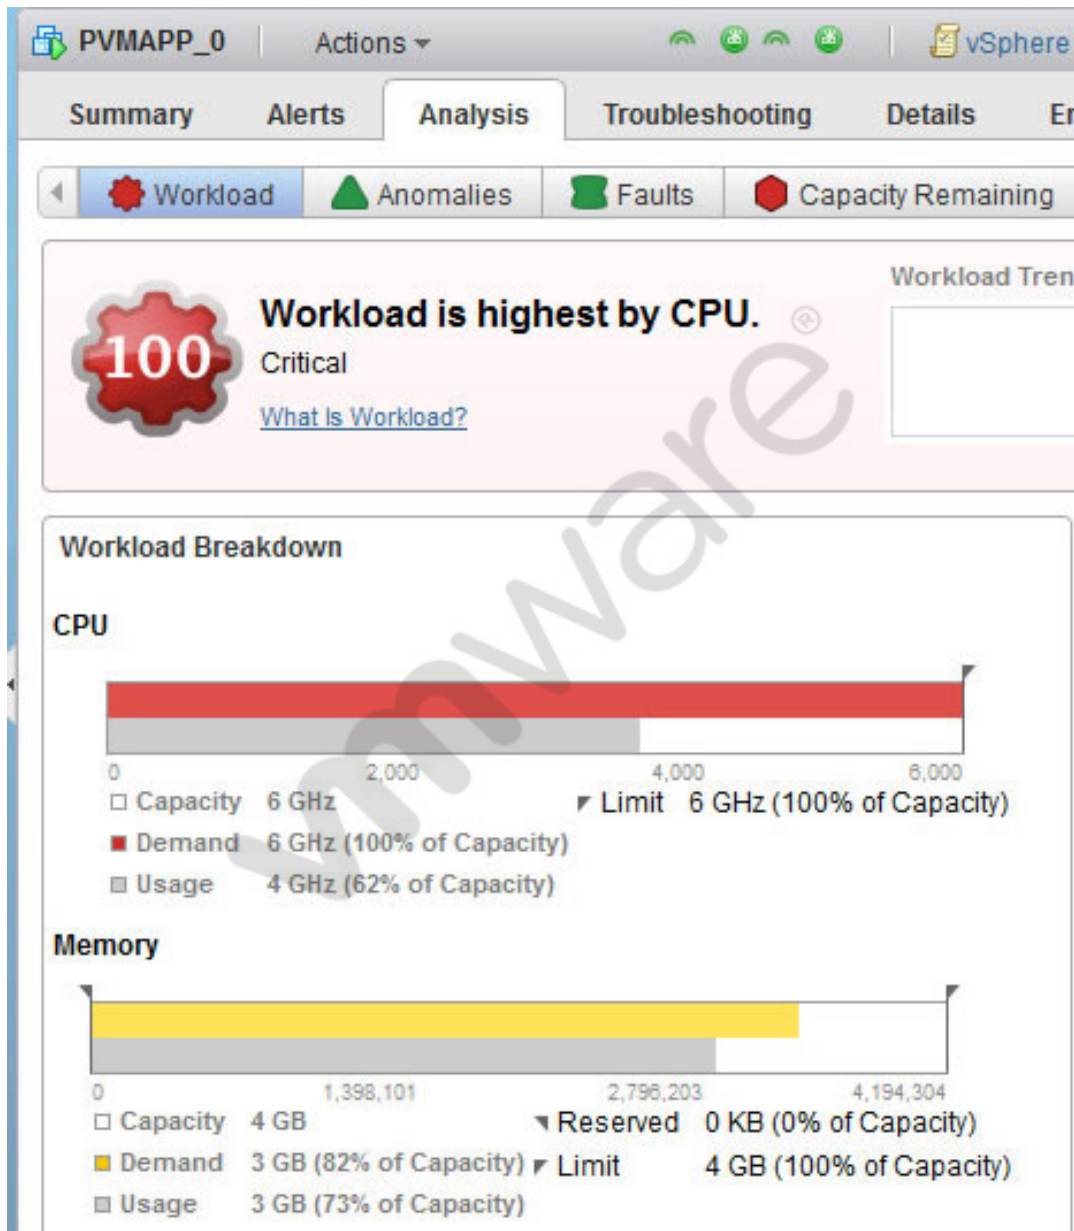

An administrator receives vRealize Operations alerts for the Health of the virtual machine PVMAPP\_0 as shown in Exhibit 1:

The administrator clicks on the Analysis pane, as shown in Exhibit 2:

## Dumps with PDF and VCE ( +Free VCE Software )

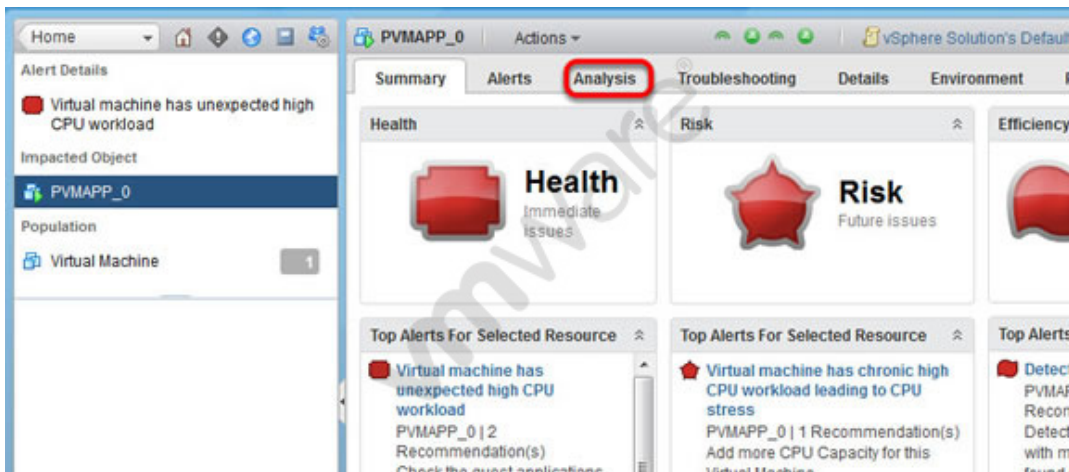

Based on the exhibits, what action would correctly address the performance problems observed?

- A. Increase the number of vCPUs for PVMAPP\_0.
- B. Increase the allocation of memory for PVMAPP\_0.
- C. Increase the Memory limit for PVMAPP\_0.
- D. Increase the reservation in MHz for vCPUs for PVMAPP\_0.

**Answer: A**

### Question No : 3

An administrator is building a large virtual machine that will require as many vCPUs as the host can support. An ESXi 6.x host has these specifications:

- ✍ Six 32-core Intel Xeon Processors
- ✍ 256 GB of Memory
- ✍ 512 GB Local disk space using VMFS5

What is the maximum number of virtual CPUs that the virtual machine can be allocated?

- A. 64
- B. 128
- C. 192
- D. 256

**Answer: B**

**Question No : 4**

An ESXi 6.x host in the vCenter Server inventory has disconnected due to an All Paths Down (APD) situation. An administrator has corrected the APD issue on the host, but it still remains disconnected.


What action should the administrator take next?

- A. Select Restart Management Agents from the DCUI.
- B. Execute esxcli system settings advanced set -d /Scsi/FailVMIOonAPD.
- C. Modify the advanced parameter /Disk/ApdTokenRetryCount.
- D. Enable the advanced parameter /Misc/APDHandlingEnable.

**Answer: A**

**Question No : 5**

An administrator is attempting to add two Intel-based hosts to a vSphere 6.x cluster containing all Intel-based hosts. The cluster has Enhanced vMotion Compatibility (EVC) enabled, but while performing the action, the administrator receives the error shown in the Exhibit:

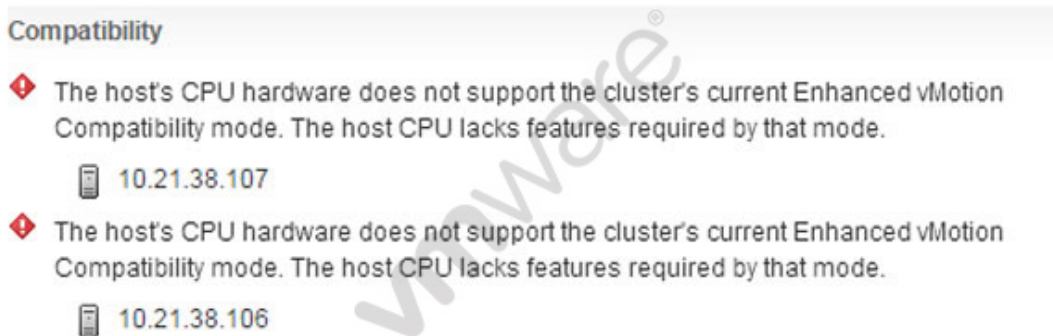

Which three conditions would explain the error? (Choose three.)

- A. EVC is using a newer baseline than the hosts in the Exhibit.
- B. The ESXi hosts have an incompatible version of Streaming SIMD Extensions (SSE).
- C. The ESXi hosts have the Intel No-Execute feature disabled.
- D. EVC is using an older baseline than the hosts in the Exhibit.
- E. The ESXi host does not have the Intel VT-d feature enabled.

**Answer: A,B,C**

**Question No : 6**

Which three options are available for ESXi Certificate Replacement? (Choose three.)

- A. VMware Certificate Authority mode
- B. Custom Certificate Authority mode
- C. Thumbprint mode
- D. Hybrid Deployment
- E. VMware Certificate Endpoint Authority Mode

**Answer: A,B,C**

**Question No : 7**

The command `esxcli network vm list` displays four virtual machines connected to the Production vSwitch. Within the vSphere Web Client, five virtual machines are seen.

What explains this behavior?

- A. The fifth virtual machine is currently powered off.
- B. The fifth virtual machine has two vnic's.
- C. The fifth virtual machine has an invalid IP address.
- D. The fifth virtual machine has an invalid MAC address.

**Answer: A**

**Question No : 8**

An administrator is configuring virtual machines to use Worldwide Port Names (WWPNs) to access the storage.

Which two conditions are required? (Choose two.)

- A. The switches in the fabric must be N-Port ID Virtualization aware.
- B. The virtual machines must be using passthrough Raw Disk Mapping (RDMp).

- C. The virtual machines must be using Virtual Machine Disk (VMDK).
- D. The switches in the fabric must be Storage I/O Control aware.

**Answer: A,B**

**Question No : 9**

An administrator needs to migrate a very large virtual machine to vCloud Air from a branch office.

Which two components can be used to meet this requirement? (Choose two.)

- A. vCloud Air Disaster Recovery
- B. Offline Data Transfer
- C. vCloud Connector
- D. Data Center Extensions

**Answer: B,C**

**Question No : 10**

Which two features are available for virtual machines configured with DirectPath I/O? (Choose two.)

- A. Fault Tolerance
- B. Suspend and Resume
- C. Virtual Symmetric Multi-Processing (vSMP)
- D. Virtual Non-Uniform Memory Access (vNUMA)

**Answer: C,D**

**Question No : 11**

An administrator notices that 8 out of 10 virtual machines have memory ballooning and swapping. However, virtual machine 9 is not ballooning or swapping and virtual machine 10 is not ballooning but is swapping.

Which two statements explain the behavior of virtual machine 9 and virtual machine 10?  
(Choose two.)

- A. Virtual machine 9 has a 100% memory reservation.
- B. Virtual machine 10 has a memory limit configured.
- C. Virtual machine 9 has memory shares set to HIGH.
- D. Virtual machine 10 does not have VMware Tools enabled or installed.

**Answer: A,D**

**Question No : 12**

An administrator is having a problem configuring Storage I/O Control on a Datastore.

Which two conditions could explain the issue? (Choose two.)

- A. A host is running ESXi 4.0.
- B. An ESXi host does not have appropriate licensing.
- C. The vCenter Server version is 5.0.
- D. The vCenter Server License is Standard.

**Answer: A,B**

**Question No : 13**

An administrator created a six node Virtual SAN cluster, created a fault domain, and moved three of the six nodes into that domain.

A node that is a member of the fault domain fails.

What is the expected result?

- A. The remaining two fault domain members are treated as failed.
- B. The remaining two fault domain members stay protected by the domain.
- C. One of the non-member nodes will be automatically added to the fault domain.
- D. VMware High Availability will restart virtual machines on remaining nodes in the domain.

**Answer: A**



**Question No : 14**

Which two scenarios would cause a Fault Tolerance-enabled virtual machine to fail to power the Secondary virtual machine? (Choose two.)

- A. The host has entered a Network Partitioned state.
- B. vSphere High Availability (HA) is disabled on the host cluster.
- C. Enhanced vMotion Compatibility (EVC) is enabled on the host cluster.
- D. vSphere Distributed Power Management (DPM) is enabled on the host cluster.

**Answer: A,B**

**Question No : 15**

An administrator wants to configure an ESXi 6.x host to use Active Directory (AD) to manage users and groups. The AD domain group ESX Admins is planned for administrative access to the host.

Which two conditions should be considered when planning this configuration? (Choose two.)

- A. If administrative access for ESX Admins is not required, this setting can be altered.
- B. The users in ESX Admins are not restricted by Lockdown Mode.
- C. An ESXi host provisioned with Auto Deploy cannot store AD credentials.
- D. The users in ESX Admins are granted administrative privileges in vCenter Server.

**Answer: A,C**

**Question No : 16**

An administrator wants to clone the configuration of an existing ESXi 6.x host to a new group of hosts, but does not want to clone storage specific settings.


Which action would accomplish this?

- A. Uncheck sub-profile
- B. Remove sub-profile
- C. Revert profile
- D. Disable VM Storage Profile

**Answer: B**

**Question No : 17**

Refer to the Exhibit.

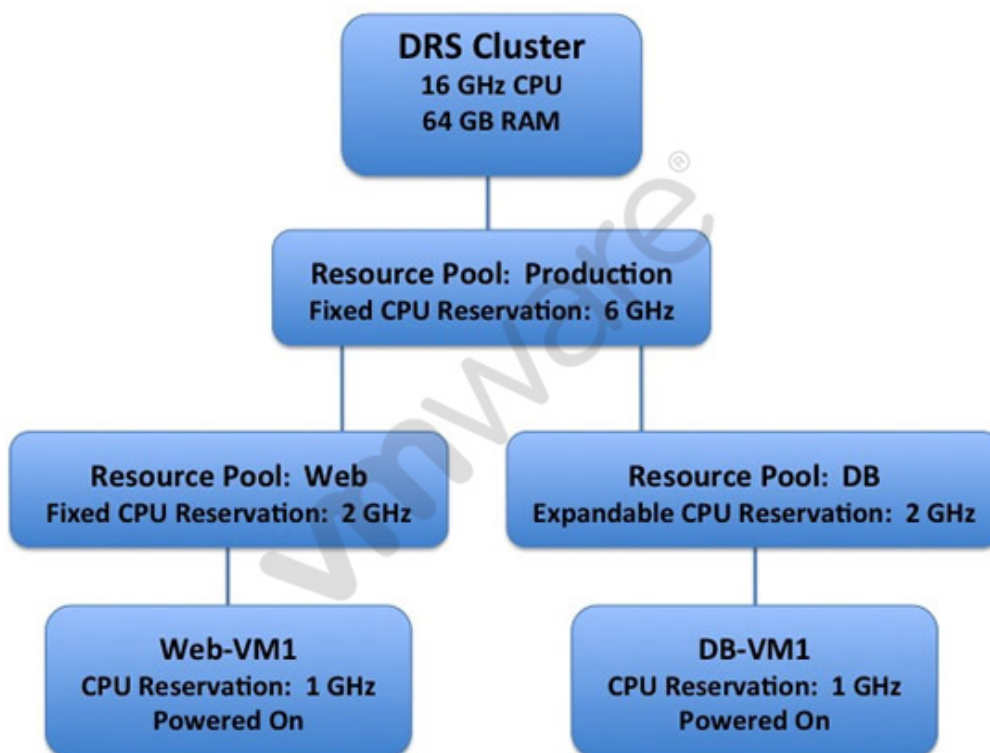

A vSphere 6.x DRS cluster is configured as shown in the Exhibit.

Based on the exhibit, which statement is true?

- A. A virtual machine can be powered on in the Web Resource Pool with a 3 GHz CPU Reservation.
- B. A virtual machine can be powered on in the Web Resource Pool with a 4 GHz CPU Reservation.
- C. A virtual machine can be powered on in the DB Resource Pool with a 3 GHz CPU Reservation.

D. A virtual machine can be powered on in the DB Resource Pool with a 4 GHz CPU Reservation.

**Answer: C**

**Question No : 18**

A user notifies an administrator that Content Libraries are not visible.

What is a possible solution?

- A. Assign the user the read-only role at the global permission level.
- B. Assign the user the read-only role at the vCenter Server root level.
- C. Assign the user the read-only role at the vCenter Server data center level.
- D. Assign the user the read-only role at the vCenter Server cluster level.

**Answer: A**

**Question No : 19**

A device's vStorage API for Array Integration (VAAI) support status command line output shows:

```
naa.500253825002a865 VAAI Plugin Name: ATS Status: unsupported Clone Status: unsupported Zero Status: supported Delete Status: unsupported
```

What is the corresponding VAAI support status in the vSphere Web Client?

- A. Unknown
- B. Supported
- C. Not supported
- D. Unsupported

**Answer: A**

**Question No : 20**

An administrator needs to configure a storage solution for a vSphere 6.x implementation with these characteristics:

- ✍ Snapshot support
- ✍ vMotion Capability
- ✍ Clustering across multiple ESXi hosts
- ✍ Database application with high transaction count
- ✍ vFlash Read Cache

Which solution meets all of the stated requirements?

- A. A vmdk located on a Shared VMFS datastore
- B. A Physical Mode Raw Device Mapped LUN
- C. A Virtual Mode Raw Device Mapped LUN
- D. A Virtual SAN-based vmdk

**Answer: C**

#### **Question No : 21**

What are three recommended prerequisites before upgrading virtual machine hardware? (Choose three.)

- A. Create a backup or snapshot of the virtual machine.
- B. Upgrade VMware Tools to the latest version.
- C. Verify that the virtual machine is stored on VMFS3, VMFS5, or NFS datastores.
- D. Detach all CD-ROM/ISO images from the virtual machines.
- E. Set the Advanced Parameter virtualHW.version = 11

**Answer: A,B,C**

#### **Question No : 22**

An administrator is creating a new Content Library. It will subscribe to another remote Content Library without authentication enabled. Optimal performance is desired for the configuration.

What two steps should be taken to set up the library? (Choose two.)

- A. The Subscription URL should be provided.
- B. The library should be published externally.
- C. A file system should be used for this library.
- D. A datastore should be used for this library.

Answer: A,D

### Question No : 23

An administrator would like to use a passphrase for their ESXi 6.x hosts which has these characteristics:

- ✍ Minimum of 21 characters
- ✍ Minimum of 2 words


Which advanced options must be set to allow this passphrase configuration to be used?

- A. retry=3 min=disabled, disabled, 7, 21, 7 passphrase=2
- B. retry=3 min=disabled, disabled, 21, 7, 7 passphrase=2
- C. retry=3 min=disabled, disabled, 2, 21, 7
- D. retry=3 min=disabled, disabled, 21, 21, 2

Answer: B

### Question No : 24

Refer to the Exhibit.

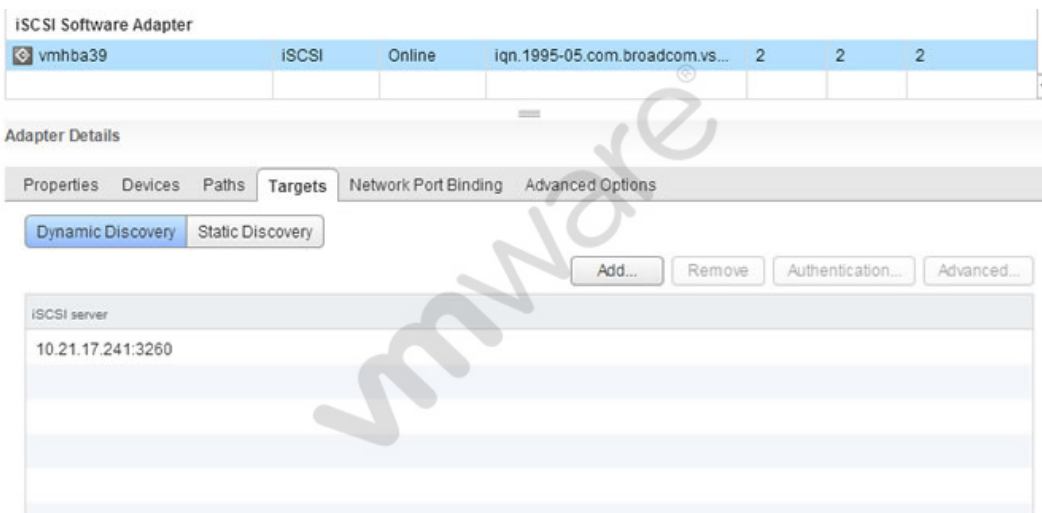

Which tab shows the Hardware Acceleration support status?

- A. Devices
- B. Properties
- C. Paths
- D. Advanced Options

**Answer: A**

**Question No : 25**

Which secondary Private VLAN (PVLAN) type can communicate and send packets to an Isolated PVLAN?

- A. Community
- B. Isolated
- C. Promiscuous
- D. Primary

**Answer: C**

**Question No : 26**

An administrator runs the command `esxcli storage core device list` and sees the following output:

```
mpx.vmhba1:C0:T0:L0 Display Name: RAID 5 (mpx.vmhba1:C0:T0:L0) Has Settable  
Display Name: false Size: 40960 Device Type: Direct-Access Multipath Plugin: NMP Devfs  
Path: /vmfs/devices/disks/mpx.vmhba1:C0:T0:L0 Status: off Is Local: true
```

What can be determined by this output?

- A. The device is being used for vFlash Read Cache.
- B. The device is in a Permanent Device Loss (PDL) state.
- C. The device is a local Solid State Device (SSD).
- D. The device is in an All Paths Down (APD) state.

**Answer: B**

**Question No : 27**


What is the highest object level from which a virtual machine can inherit privileges?

- A. Host Folder
- B. Data Center
- C. Data Center Folder
- D. VM Folder

**Answer: C**

**Question No : 28**

Refer to the Exhibit.

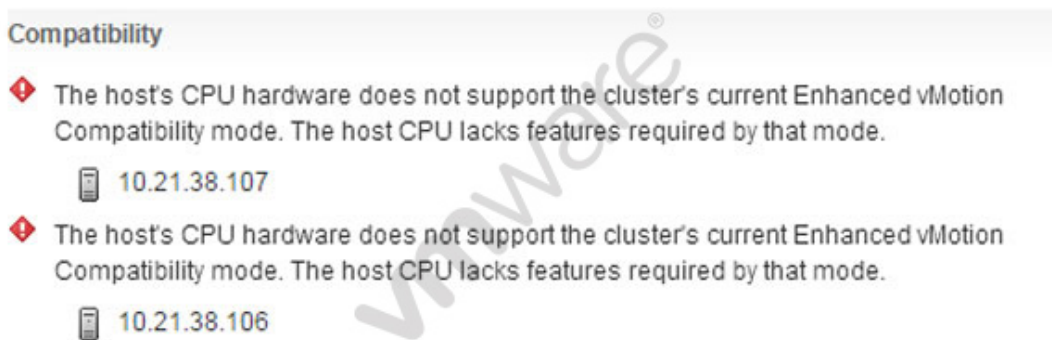

An administrator is attempting to enable Enhanced vMotion Compatibility (EVC), but receives the error shown in the Exhibit.

Which condition would explain the error?

- A. The ESXi hosts are not licensed for EVC.
- B. The administrator does not have privileges to enable EVC.
- C. The ESXi host CPU has the Intel No-Execute feature disabled.
- D. The administrator has turned on Intel Virtualization Technology.

**Answer: C**

**Question No : 29**

An administrator notices that the time on an ESXi 6.x host is incorrect.

Which two actions should the administrator take to correct this issue? (Choose two.)

- A. Modify the time for the host using the vSphere client.
- B. Correct the NTP settings in the /etc/ntp.conf file.
- C. Configure NTP from the Direct Console User Interface.
- D. Use the vicfg-ntp command from the vSphere Management Appliance.

**Answer: A,B**

**Question No : 30**

An administrator has been instructed to secure existing virtual machines in vCenter Server.

Which two actions should the administrator take to secure these virtual machines? (Choose two.)

- A. Disable native remote management services
- B. Restrict Remote Console access
- C. Use Independent Non-Persistent virtual disks
- D. Prevent use of Independent Non-Persistent virtual disks

**Answer: B,D**

**Question No : 31**

An administrator has a virtual machine (VM) that uses a shared USB device.

Which option will allow the VM to utilize vMotion while retaining the maximum possible functionality?

- A. Disable the USB device from the VM.
- B. Configure the VM to support vMotion while the device is connected.
- C. Enable migration support for the individual USB device.
- D. Remove the device from the VM.

**Answer: B**



**Question No : 32**

Which two statements are true regarding Virtual SAN Fault Domains? (Choose two.)

- A. They enable Virtual SAN to tolerate the failure of an entire physical rack.
- B. Virtual SAN ensures that no two replicas are provisioned on the same domain.
- C. Virtual SAN ensures that all replicas are provisioned on the same domain.
- D. They require VMware High Availability (HA) to ensure component distribution across domains.

**Answer: A,B**

**Question No : 33**

An administrator is implementing a vSphere 6.x environment containing one vCenter Server and five ESXi hosts. The administrator has just finished deploying the vCenter Server appliance with an embedded Platform Services Controller (PSC) and needs to ensure that default security certificates within the vSphere 6.x environment are replaced with new certificates.

What should the administrator do to complete this task with the least administrative effort?

- A. Add the ESXi hosts to vCenter Server before updating the VMCA root certificate on the PSC.
- B. Make VMCA an Intermediate Certificate Authority to ensure each added ESXi hosts receives the same certificate.
- C. Replace the VMCA root certificate before adding the ESXi hosts to vCenter Server.
- D. Create ESXi host security certificates using the SSL Thumbprint mode to ensure consistency among all hosts.

**Answer: C**

**Question No : 34**


VMware vSphere Replication protects virtual machines from partial or complete site failures by replicating the virtual machines between which three sites? (Choose three.)

- A. From a source site to a target site.
- B. From within a single site from one cluster to another.
- C. From multiple source sites to a shared remote target site.
- D. From a single source site to multiple remote target sites.
- E. From multiple source sites to multiple remote target sites.

Answer: A,B,C

**Question No : 35**

Refer to the Exhibit.

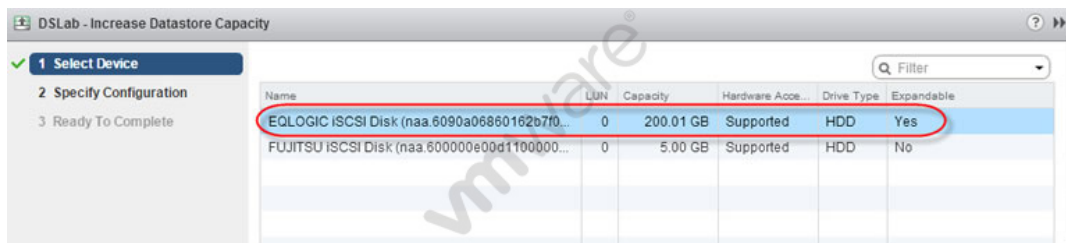

What will be the result of selecting the highlighted device?

- A. Datastore will grow up to 200.01GB using the remaining free space on the device.
- B. Datastore will add 200.01GB by adding the device as a second extent.
- C. The device size can be expanded to be larger than 200.01 GB in size.
- D. The device is not suitable for this operation.

Answer: A

**Question No : 36**

Which Advanced Setting should be created for the vCenter Server to change the expiration policy of the vpxuser password?

- A. VimPasswordExpirationInDays
- B. VimExpirationPasswordDays
- C. VimPassExpirationInDays
- D. VimPasswordRefreshDays

Answer: A

**Question No : 37**

An administrator has decided to create 10 ESXi 6.x hosts via Auto Deploy for a new Test/Dev cluster. The hosts are configured to obtain their networking configuration via DHCP.

Which Direct Console User Interface option should the administrator use to renew the DHCP lease for the hosts?

- A. Restore Network Settings
- B. Test Management Network
- C. Restart Management Network
- D. Network Restore Options

**Answer: C**

**Question No : 38**

A failed upgrade from vCenter Server version 5.x to version 6.0 produces the following error:

[00800 error 'Default'] Database version id '600' is incompatible with this release of VirtualCenter.

What is the cause of the upgrade failure?

- A. There was a database schema upgrade failure during the installation.
- B. The VMWAREVCMSDS service was upgraded before the vCenter Server service.
- C. The VMware Directory Service database failed during the installation.
- D. There was an incompatible ODBC driver version for the database.

**Answer: A**

**Question No : 39**

Which password meets ESXi 6.x host password requirements?

- A. 8kMVnn2x!
- B. zNgtnJBA2
- C. Nvgt34kn44
- D. !b74wr

**Answer: A**

**Question No : 40**

Which two roles can be modified? (Choose two.)

- A. Administrator
- B. Network Administrator
- C. Datastore Consumer
- D. Read-Only

**Answer: B,C**

**Question No : 41**

An administrator is experiencing network connectivity issues between virtual machines. The virtual machines and hosts are configured as follows:

- ✍ VM1 is running on Host1
- ✍ VM2 is running on Host2
- ✍ Both Host1 and Host2 are attached to the vSphere Distributed Switch dvSwitch1
- ✍ Both Host1 and Host2 are using vmnic0 and vmnic1 on dvSwitch1
- ✍ Both virtual machines are using the default portgroup for network traffic

What are three settings the administrator should investigate while troubleshooting the connectivity issue? (Choose three.)

- A. VLANs of the physical NICs
- B. Failover order of the uplinks
- C. Virtual NIC connectivity to the dvSwitch
- D. Security policy of the portgroup
- E. Traffic shaping on the portgroup

**Answer: A,B,C**

**Question No : 42**

Which two conditions would prevent an administrator from upgrading an existing vCenter Server Appliance to vSphere 6.x? (Choose two.)

- A. The appliance has been configured to use an external Single Sign-On server.
- B. The administrator did not export the appliance configuration.
- C. The administrator is using an appliance with an embedded Platform Services Controller.
- D. The ESXi Host that the appliance will run on has not been placed into Maintenance Mode.

**Answer: A,B**

**Question No : 43**

What is the name of the command line utility that checks for VMFS5 metadata corruption?

- A. vmkfstools --check
- B. voma
- C. vmfsanalyzer
- D. esxcli vmfs check

**Answer: B**

**Question No : 44**

An administrator is troubleshooting a virtual machine that has unexpectedly powered off.

Which two logs should be used to troubleshoot the issue? (Choose two.)

- A. vmware.log
- B. hostd.log
- C. syslog.log
- D. shell.log

**Answer: A,B**

**Question No : 45**

An administrator uses the `df -h` command and notices that an NFS datastore is reporting a capacity of 0 Bytes.

What condition would cause this to occur?

- A. The NFS server on which the datastore resides is down.
- B. The datastore was mounted as Read/Write.
- C. The datastore was mounted as Read-Only.
- D. The datastore was created with NFS version 4.1.

**Answer: A**

**Question No : 46**

An administrator is unable to patch an ESXi 6.x host using VMware Update Manager.

What is an alternative option for patching a host?

- A. Upload the offline bundle to a datastore and execute the command `esxcli software vib install -d` to apply it manually.
- B. Upload the vib to a datastore and execute the command `esxcli software vib install -d` to apply it manually.
- C. Upload the offline bundle to a datastore and execute the command `esxupdate install -v` to apply it manually.
- D. Upload the vib to a datastore and execute the command `esxupdate install -v` to apply it manually.

**Answer: A**

**Question No : 47**

When attempting to place a datastore in Maintenance Mode, the task remains at 1%.

What are two potential causes for this? (Choose two.)

- A. Storage DRS is disabled on one or more virtual machine(s) disk(s).
- B. Storage DRS rules prevent migration recommendations for the disk.
- C. Storage DRS datastores have insufficient space to accommodate failover.
- D. Storage DRS provisioning network has been limited with I/O control policies.

**Answer: A,B**

**Question No : 48**




Which two scenarios could cause Storage DRS to be disabled on a Virtual Disk (VMDK)?  
(Choose two.)

- A. The VMDK is an independent disk.
- B. The virtual machine has vSphere Fault Tolerance enabled.
- C. The VMDK is hosted on NFS storage.
- D. The virtual machine has a CD-ROM/ISO image connected.

**Answer: A,B**

**Question No : 49**

A vSphere Web Client task fails while creating a VMFS datastore on a disk with these characteristics:

-  The disk was formatted with an Master Boot Record (MBR) partition table
-  The disk was not erased
-  The disk is visible in the vSphere Web Client

What action needs to be performed to resolve the issue?

- A. Delete the partitions manually with partedUtil.
- B. Create a VMFS3 file system first, then upgrade it.
- C. Create a VMFS5 file system with the command `esxcli storage filesystem add`.
- D. Delete the data with the `vmkfstools` command.

**Answer: A**

**Question No : 50**

Which two statements are true regarding VMFS3 volumes in ESXi 6.x? (Choose two.)

- A. Creation of VMFS3 volumes is unsupported.
- B. Upgrading VMFS3 volumes to VMFS5 is supported.
- C. Existing VMFS3 volumes are unsupported.
- D. Upgrading VMFS3 volumes to VMFS5 is unsupported.

**Answer: A,B**

**Question No : 51**

Which two capabilities does the vSphere Replication Client Plug-in provide? (Choose two.)

- A. Configure connections between vSphere Replication Sites.
- B. Deploy and register additional vSphere Replication Servers.
- C. Reconfigure the vSphere Replication Server.
- D. Configure an external database for a vSphere Replication Site.

**Answer: A,B**

**Question No : 52**

Which two statements are true regarding upgrading from a Distributed vCenter Server 5.x to vCenter Server 6.x? (Choose two.)

- A. vCenter Single Sign-on becomes part of the Platform Services Controller.
- B. vCenter Inventory Service becomes part of the Platform Services Controller.
- C. The vCenter Server service is not migrated during the upgrade process.
- D. The vSphere License Service is migrated to the new vCenter Server 6.x instance.

**Answer: A,C**

**Question No : 53**

Which two reasons would prevent Storage Distributed Resource Scheduler (SDRS) from



operating on a datastore? (Choose two.)

- A. The datastore has Storage I/O Control disabled.
- B. The datastore is connected to an unsupported host.
- C. The datastore is hosted on an NFS server.
- D. The datastore is hosted on an iSCSI server.

**Answer: A,B**

**Question No : 54**

An administrator needs to migrate a legacy physical application server to a virtual machine within a vSphere 6 cluster. As part of the conversion, the administrator must reduce the size of the virtual disks.

What action should the administrator take to create a virtual machine with smaller virtual disks than the original physical server?

- A. Shut down the physical server and use VMware Converter cold cloning with volume-based cloning at the disk level.
- B. Use VMware Converter hot cloning with volume-based cloning at the block level.
- C. Shut down the physical server and use VMware Converter cold cloning with volume-based cloning at the file level.
- D. Use VMware Converter hot cloning with volume-based cloning at the file level.

**Answer: D**

**Question No : 55**

An administrator wants to configure a High Availability cluster to allow virtual machines a 10 minute window to shut down in the event of a Host Isolation incident.


What two configuration settings would satisfy this requirement? (Choose two.)

- A. Set the advanced option das.isolationshutdowntimeout = 10.
- B. Set the advanced option das.isolationshutdowntimeout = 600.
- C. Configure Host Isolation Response to Shut Down and Restart VMs.
- D. Configure Host Isolation Response to Power Off and Restart VMs.

Answer: B,C

**Question No : 56**

An administrator has configured a cluster with the Host Failures Cluster Tolerates admission control policy, as shown in the Exhibit:

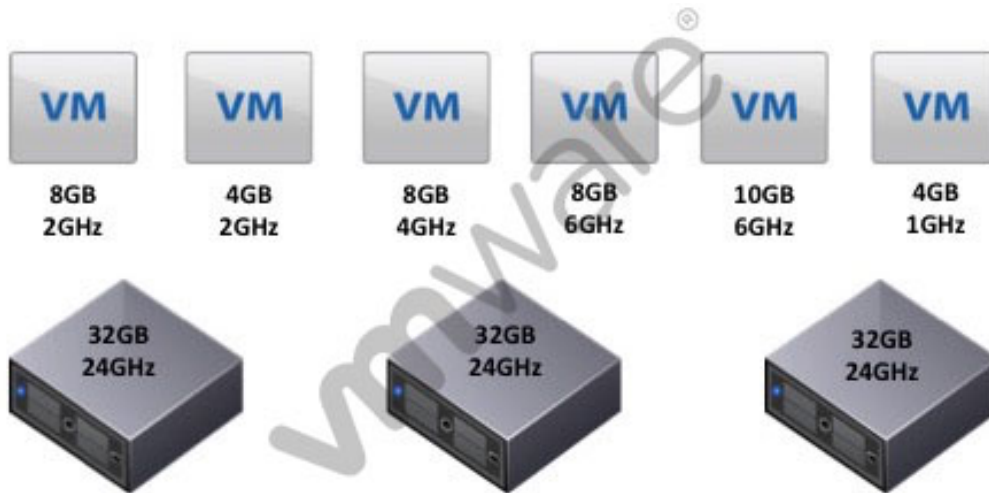

Based on the exhibit, which two statements are true? (Choose two.)

- A. The number of slots per cluster node is four.
- B. The cluster can sustain loss of only one node.
- C. The number of slots per cluster node is three.
- D. The cluster can sustain the loss of two nodes.

Answer: B,C

**Question No : 57**

An administrator is writing a kickstart script to upgrade an ESXi 6.x host.

In which three locations can the script reside? (Choose three.)

- A. NFS
- B. USB

- C. HTTP
- D. TFTP
- E. PXE

**Answer: A,B,C**

**Question No : 58**

What is the command to list multipathing modules on an ESXi 6.x host?

- A. esxcli storage core list plugin --plugin-class=MP
- B. esxcli storage core list plugin --class-plugin=MP
- C. esxcli storage core plugin list --plugin-class=MP
- D. esxcli storage core plugin list --class-plugin=MP

**Answer: C**

**Question No : 59**

An administrator has recently audited the environment and found numerous virtual machines with sensitive data written to the configuration files.

To prevent this in the future, which advanced parameter should be applied to the virtual machines?

- A. isolation.tools.setinfo.disable = true
- B. isolation.tools.setinfo.enable = true
- C. isolation.tools.setinfo.disable = false
- D. isolation.tools.setinfo.enable = false

**Answer: A**

**Question No : 60**

An administrator observes a warning on the vSphere High Availability (HA) cluster:

This host currently has no management network redundancy

Which two actions would address the warning? (Choose two.)

- A. Add an additional uplink to the management vmknic.
- B. Include the advanced HA parameter das.ignoreRedundantNetWarning.
- C. Add an additional management vmknic to the vSwitch.
- D. Include the advanced HA parameter das.ignoreNetWarningRedundancy.

**Answer: A,B**

**Question No : 61**

An administrator is troubleshooting a virtual machine performance issue using vRealize Operations.

Which two badges would help to identify possible resource contention concerns? (Choose two.)

- A. Health > Workload
- B. Health > Faults
- C. Risk > Time Remaining
- D. Risk > Stress

**Answer: A,D**

**Question No : 62**


Which three statements are true when restoring a Resource Pool Tree? (Choose three.)

- A. Distributed Resource Scheduler must be set to manual.
- B. Restoring a snapshot can only be done on the same cluster from which it was taken.
- C. No other resource pools can be present in the cluster.
- D. Restoring a resource pool tree must be done in the vSphere Web Client.
- E. Enabling Enhanced vMotion Compatibility on the cluster is required.

**Answer: B,C,D**

**Question No : 63**

Refer to the Exhibit.

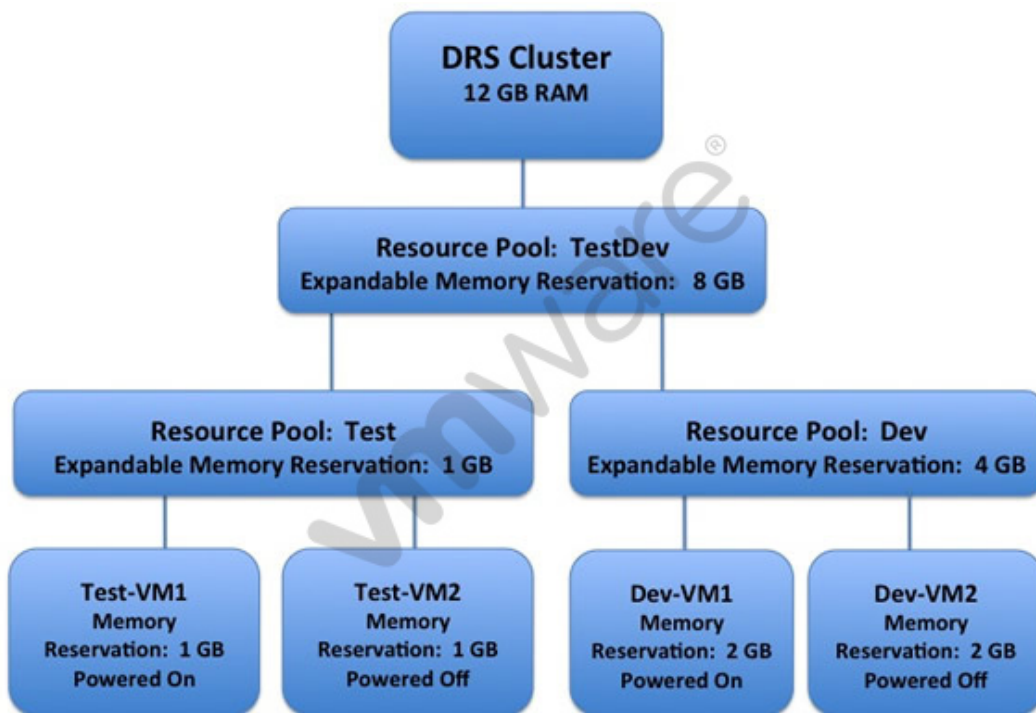

An administrator has configured a vSphere 6.x DRS cluster as shown in the Exhibit.

Based on the exhibit, which statement is true?

- A. A virtual machine can be powered on in the Test Resource Pool with a 6 GB Memory Reservation.
- B. A virtual machine can be powered on in the Dev Resource Pool with a 8 GB Memory Reservation.
- C. A virtual machine from both the Test Resource Pool and the Dev Resource Pool can be powered on with a 4 GB Memory Reservation.
- D. No more virtual machines can be powered on due to insufficient resources.

**Answer: A**

### Question No : 64

An administrator wishes to give a user the ability to manage snapshots for virtual machines.


Which privilege does the administrator need to assign to the user?

- A. Datastore.Allocate Space
- B. Virtual machine.Configuration.create snapshot
- C. Virtual machine.Configuration.manage snapshot
- D. Datastore.Browse Datastore

Answer: A

**Question No : 65**

Refer to the Exhibit.

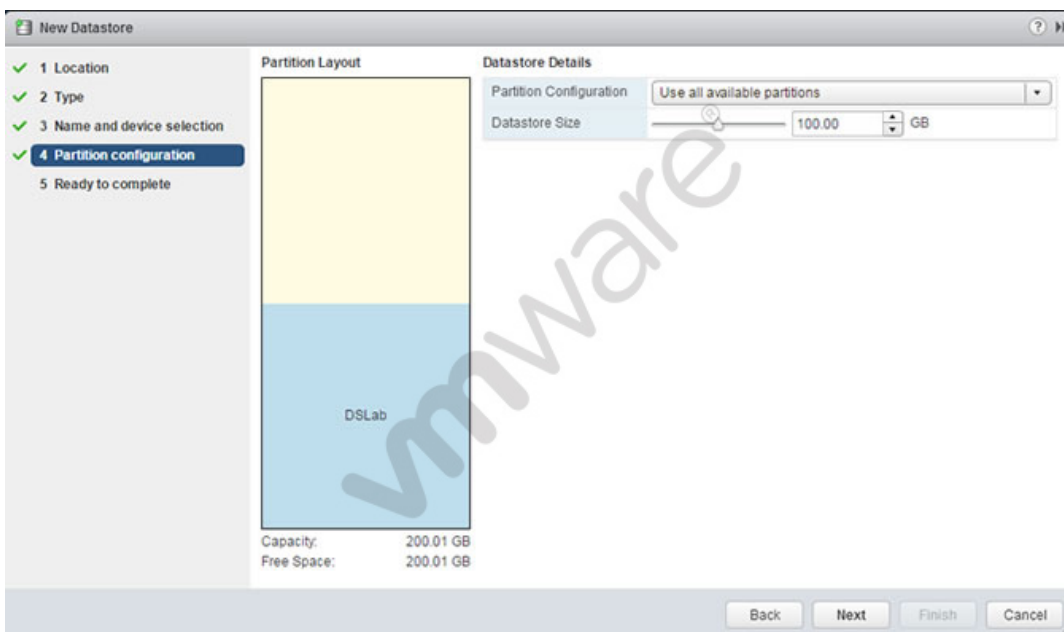

What will be created upon completion of the steps in this wizard?

- A. 100GB VMFS5 datastore with free space available for expansion
- B. 100GB VMFS5 datastore with free space available for a second datastore
- C. 100GB VMFS3 datastore
- D. 200.01 GB VMFS5 datastore

Answer: A

**Question No : 66**

Which two statements are true regarding iSCSI adapters? (Choose two.)

- A. Software iSCSI adapters require vmkernel networking.
- B. Independent Hardware iSCSI adapters offload processing from the ESXi host.
- C. Dependent Hardware iSCSI adapters do not require vmkernel networking.
- D. Independent Hardware iSCSI adapters require vmkernel networking.

**Answer: A,B**

**Question No : 67**

Which two statements are correct regarding vSphere certificates? (Choose two.)

- A. ESXi host upgrades do not preserve the SSL certificate and reissue one from the VMware Certificate Authority (VMCA).
- B. ESXi host upgrades preserve the existing SSL certificate.
- C. ESXi hosts have assigned SSL certificates from the VMware Certificate Authority (VMCA) during install.
- D. ESXi hosts have self-signed SSL certificates by default.

**Answer: B,C**

**Question No : 68**

Refer to the Exhibit.

```

7:03:33pm up 17 days 6:15, 750 worlds, 21 VMs, 47 vCPUs; CPU load average: 0.17, 0.24, 0.28
Power Usage: 158W, Power Cap: N/A
PSTATE MHZ:
CPU %USED %UTIL %C0 %C1 %C2
 0  8.0 17.5 18 52 30
 1  4.9 11.9 12 49 39
 2  7.7 15.8 16 63 21
 3  3.3  8.0  8 56 36
 4  9.3 19.0 19 64 17
 5  3.8  9.4  9 65 26
 6  5.2 11.6 11 60 28
 7  6.8 14.1 14 54 32
 8  4.8 10.6 11 77 12
 9  4.4  9.4  9 55 35
10  3.2  7.6  9 76 14
11  3.5  8.0  8 59 33
12 13.8 25.8 24 34 41
13  7.4 14.9 15 35 50
14 13.6 25.6 26 26 48
15  3.6  7.9  8 44 48
16  6.8 13.3 13 23 63
17  3.5  7.5  7 31 62
18  6.4 12.5 12 33 55
19  3.4  7.2  7 29 64
20  2.7  5.7  6 37 58
21  5.2  9.6 10 19 72
22  4.5  8.7  9 33 58
23  4.4  8.5  8 41 51
    
```

An administrator is troubleshooting intermittent poor performance of virtual machines in a vSphere 6.x cluster. Investigating esxtop data shows that the only statistic that stands out is %CSTP as depicted in Exhibit 1:

```

7:03:33pm up 44 days 2:36, 502 worlds, 1 Vm, 8 vCPUs; CPU load average: 1.31, 1.36, 1.34
CPU STATE(s): 00 00 00 00 00 00 00
CPU STATE(s): 00 00 00 00 00 00 00
  ID          PID NAME          SHR  %USED  %CSTP  %WAIT  %VMWAIT  %STY  %IOPS  %ORLP  %CSTP
00472801 00472801 TestVM      33 100.00  0.00  80.21  0.00  47.79  0.00  0.00  80.43
00472802 00472802 3300VM      33 107.38  0.00  80.38  0.00  34.29  0.00  0.00  80.43
    
```

The administrator proceeds to switch to the Power Management screen and observes the data depicted in Exhibit 2:

```

7:03:33pm up 17 days 6:15, 750 worlds, 21 VMs, 47 vCPUs; CPU load average: 0.17, 0.24, 0.28
Power Usage: 158W, Power Cap: N/A
PSTATE MHZ:
CPU %USED %UTIL %C0 %C1 %C2
 0  8.0 17.5 18 52 30
 1  4.9 11.9 12 49 39
 2  7.7 15.8 16 63 21
 3  3.3  8.0  8 56 36
 4  9.3 19.0 19 64 17
 5  3.8  9.4  9 65 26
 6  5.2 11.6 11 60 28
 7  6.8 14.1 14 54 32
 8  4.8 10.6 11 77 12
 9  4.4  9.4  9 55 35
10  3.2  7.6  9 76 14
11  3.5  8.0  8 59 33
12 13.8 25.8 24 34 41
13  7.4 14.9 15 35 50
14 13.6 25.6 26 26 48
15  3.6  7.9  8 44 48
16  6.8 13.3 13 23 63
17  3.5  7.5  7 31 62
18  6.4 12.5 12 33 55
19  3.4  7.2  7 29 64
20  2.7  5.7  6 37 58
21  5.2  9.6 10 19 72
22  4.5  8.7  9 33 58
23  4.4  8.5  8 41 51
    
```



Based on the information in the exhibits, which two configurations are probable causes of the poor performance? (Choose two.)

- A. The active power policy is set to Low Power.
- B. The host has active Sleep States configured in the BIOS.
- C. The active power policy is set to High Performance.
- D. The host has active Power States configured in the BIOS.




**Answer: A,B**

**Question No : 69**

Users are reporting CPU related performance problems on the virtual machine Email-Prod throughout the day.

The resource settings for the VM and the ESXi host the VM is running on are shown below:

VM:

-  Email-Prod
-  vCPUs: 4
-  Memory: 96GB

ESXi host:

-  CPU: 2 x 8 Core Processors
-  Memory: 128GB
-  NUMA architecture. 2 Nodes

Which two options would alleviate the observed performance problem for Email-Prod? (Choose two.)

- A. Enable the advanced parameter Numa.PageMigEnable.
- B. Enable the advanced parameter Numa.AutoMemAffinity.
- C. Enable CPU affinity to separate 2 vCPUs for each NUMA node.
- D. Enable CPU affinity to bind all vCPUs to one NUMA node.

**Answer: B,C**

**Question No : 70**

An administrator is upgrading an ESXi 5.5 host to ESXi 6.x and gets the following error:

MEMORY\_SIZE

What does this indicate?

- A. Insufficient memory on the ESXi host to complete the upgrade.
- B. Insufficient memory for Auto Deploy to complete the upgrade.
- C. Insufficient memory in vCenter Server to complete the upgrade.
- D. Insufficient memory for Update Manager to complete the upgrade.

**Answer: A**

### Question No : 71

An administrator creates a Private VLAN with a Primary VLAN ID of 2. The administrator then creates three Private VLANs as follows:

- ✍ Marketing
- ✍ PVLAN ID. 4
- ✍ PVLAN Type. Isolated
- ✍ Accounting
- ✍ PVLAN ID. 5
- ✍ PVLAN Type. Community
- ✍ Secretary
- ✍ PVLAN ID. 17
- ✍ PVLAN Type. Isolated

Users in the Accounting PVLAN are reporting problems communicating with servers in the Marketing PVLAN.

Which two actions could the administrator take to resolve this problem? (Choose two.)

- A. Change the PVLAN type for the Accounting network to Promiscuous.
- B. Change the PVLAN ID for the Accounting network to 2.
- C. Change the PVLAN type for Marketing network to Promiscuous.
- D. Change the PVLAN ID for Accounting network to 4.

**Answer: A,B**

**Question No : 72**

A virtual machine is exhibiting these symptoms:

- ✍ Memory usage is constantly high (94% or greater) or constantly low (24% or less).
- ✍ Free memory is consistently 6% or less and swapping frequently occurs

Which three solutions could correct this problem? (Choose three.)

- A. Verify that VMware Tools is installed on each virtual machine.
- B. Decrease the memory reservation setting, if higher than active memory.
- C. Add physical memory to the host.
- D. Disable the balloon driver in each virtual machine.
- E. Create a memory limit for each virtual machine.

**Answer: A,B,C**

**Question No : 73**

In which two vsphere.local groups should an administrator avoid adding members?  
(Choose two.)

- A. SolutionUsers
- B. Administrators
- C. DCAdmins
- D. ExternalPDUsers

**Answer: A,B**

**Question No : 74**

What are two ways to view the DNS settings for an ESXi 6.x host? (Choose two.)

- A. Use the vicfg-dns command from the vSphere Management Appliance.
- B. View the /etc/resolv.conf file on the ESXi host.
- C. Use vicfg-dns command on the ESXi host.
- D. View the /etc/dns.conf file on the ESXi host.

**Answer: A,B**

**Question No : 75**

Refer to the Exhibit.

```
6:16:06pm up 74 days 19:37, 470 worlds, 3 VMs, 4 vCPUs; CPU load average: 0.13, 0.10, 0.09
```

ADAPTR PATH	NPTH	CMDS/s	READS/s	WRITES/s	MBREAD/s	MBWRTN/s	DAVG/cmd	KAVG/cmd	GAVG/cmd	QAVG/cmd
vmhba0 -	1	6.68	0.00	0.00	0.00	0.00	0.25	0.03	0.28	0.01
vmhba1 -	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
vmhba32 -	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
vmhba33 -	2	184.06	85.35	97.27	5.31	4.88	160.91	0.01	160.92	0.00

An administrator is using the esxtop command to troubleshoot storage performance issues on a virtual machine. The esxtop capture is shown in the Exhibit.

Based on the exhibit, which two statements are true? (Choose two.)

- A. The iSCSI device is experiencing high latency.
- B. The ESXi kernel is experiencing high latency.
- C. The Guest OS is experiencing high latency and response time.
- D. The NFS device is experiencing high latency.

**Answer: A,C**

**Question No : 76**


Which three statements are correct regarding Fibre Channel over Ethernet (FCOE)? (Choose three.)

- A. The network switch must have Priority-based Flow Control (PFC) set to AUTO.
- B. The network switch must have Priority-based Flow Control (PFC) set to ON.
- C. Each port on the FCoE card must reside on the same vSwitch.
- D. Each port on the FCoE card must reside on a separate vSwitch.
- E. The ESXi host will require a reboot after moving an FCoE card to a different vSwitch.

**Answer: A,D,E**

**Question No : 77**

Refer to the Exhibit.

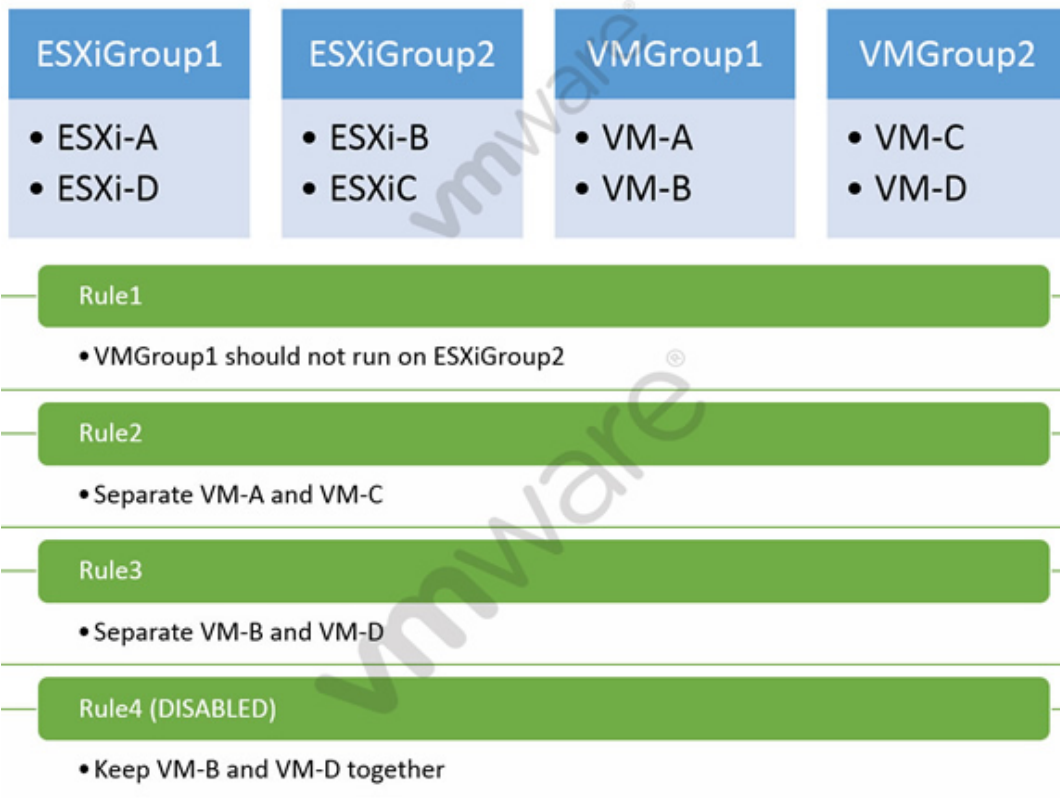

An administrator has configured Distributed Resource Scheduler (DRS) groups and Affinity Rules as shown in the Exhibit.

Based on the exhibit, which two statements are true? (Choose two.)

- A. If ESXi-A and ESXi-D failed, VM-A and VM-B would not failover.
- B. A new conflicting affinity rule will be disabled by default.
- C. VM-B and VM-D can run on the same hosts.
- D. The administrator must disable Rule3 in order to enable Rule4.

**Answer: B,D**

**Question No : 78**

During a vCenter Server upgrade, an ESXi 6.x host in a High Availability (HA) cluster fails.

Which statement is true?

- A. HA will fail the virtual machines over to an available host during the vCenter Server upgrade process.

### Microsoft Exams List

<a href="#">70-246 Dump PDF VCE</a>	<a href="#">70-485 Dump PDF VCE</a>	<a href="#">70-742 Dump PDF VCE</a>	<a href="#">98-366 Dump PDF VCE</a>
<a href="#">70-247 Dump PDF VCE</a>	<a href="#">70-486 Dump PDF VCE</a>	<a href="#">70-743 Dump PDF VCE</a>	<a href="#">98-367 Dump PDF VCE</a>
<a href="#">70-331 Dump PDF VCE</a>	<a href="#">70-487 Dump PDF VCE</a>	<a href="#">70-744 Dump PDF VCE</a>	<a href="#">98-368 Dump PDF VCE</a>
<a href="#">70-332 Dump PDF VCE</a>	<a href="#">70-488 Dump PDF VCE</a>	<a href="#">70-761 Dump PDF VCE</a>	<a href="#">98-369 Dump PDF VCE</a>
<a href="#">70-333 Dump PDF VCE</a>	<a href="#">70-489 Dump PDF VCE</a>	<a href="#">70-762 Dump PDF VCE</a>	<a href="#">98-372 Dump PDF VCE</a>
<a href="#">70-334 Dump PDF VCE</a>	<a href="#">70-490 Dump PDF VCE</a>	<a href="#">70-765 Dump PDF VCE</a>	<a href="#">98-373 Dump PDF VCE</a>
<a href="#">70-339 Dump PDF VCE</a>	<a href="#">70-491 Dump PDF VCE</a>	<a href="#">70-768 Dump PDF VCE</a>	<a href="#">98-374 Dump PDF VCE</a>
<a href="#">70-341 Dump PDF VCE</a>	<a href="#">70-492 Dump PDF VCE</a>	<a href="#">70-980 Dump PDF VCE</a>	<a href="#">98-375 Dump PDF VCE</a>
<a href="#">70-342 Dump PDF VCE</a>	<a href="#">70-494 Dump PDF VCE</a>	<a href="#">70-981 Dump PDF VCE</a>	<a href="#">98-379 Dump PDF VCE</a>
<a href="#">70-345 Dump PDF VCE</a>	<a href="#">70-496 Dump PDF VCE</a>	<a href="#">70-982 Dump PDF VCE</a>	<a href="#">MB2-700 Dump PDF VCE</a>
<a href="#">70-346 Dump PDF VCE</a>	<a href="#">70-497 Dump PDF VCE</a>	<a href="#">74-343 Dump PDF VCE</a>	<a href="#">MB2-701 Dump PDF VCE</a>
<a href="#">70-347 Dump PDF VCE</a>	<a href="#">70-498 Dump PDF VCE</a>	<a href="#">74-344 Dump PDF VCE</a>	<a href="#">MB2-702 Dump PDF VCE</a>
<a href="#">70-348 Dump PDF VCE</a>	<a href="#">70-499 Dump PDF VCE</a>	<a href="#">74-409 Dump PDF VCE</a>	<a href="#">MB2-703 Dump PDF VCE</a>
<a href="#">70-354 Dump PDF VCE</a>	<a href="#">70-517 Dump PDF VCE</a>	<a href="#">74-678 Dump PDF VCE</a>	<a href="#">MB2-704 Dump PDF VCE</a>
<a href="#">70-383 Dump PDF VCE</a>	<a href="#">70-532 Dump PDF VCE</a>	<a href="#">74-697 Dump PDF VCE</a>	<a href="#">MB2-707 Dump PDF VCE</a>
<a href="#">70-384 Dump PDF VCE</a>	<a href="#">70-533 Dump PDF VCE</a>	<a href="#">77-420 Dump PDF VCE</a>	<a href="#">MB2-710 Dump PDF VCE</a>
<a href="#">70-385 Dump PDF VCE</a>	<a href="#">70-534 Dump PDF VCE</a>	<a href="#">77-427 Dump PDF VCE</a>	<a href="#">MB2-711 Dump PDF VCE</a>
<a href="#">70-410 Dump PDF VCE</a>	<a href="#">70-640 Dump PDF VCE</a>	<a href="#">77-600 Dump PDF VCE</a>	<a href="#">MB2-712 Dump PDF VCE</a>
<a href="#">70-411 Dump PDF VCE</a>	<a href="#">70-642 Dump PDF VCE</a>	<a href="#">77-601 Dump PDF VCE</a>	<a href="#">MB2-713 Dump PDF VCE</a>
<a href="#">70-412 Dump PDF VCE</a>	<a href="#">70-646 Dump PDF VCE</a>	<a href="#">77-602 Dump PDF VCE</a>	<a href="#">MB2-714 Dump PDF VCE</a>
<a href="#">70-413 Dump PDF VCE</a>	<a href="#">70-673 Dump PDF VCE</a>	<a href="#">77-603 Dump PDF VCE</a>	<a href="#">MB2-715 Dump PDF VCE</a>
<a href="#">70-414 Dump PDF VCE</a>	<a href="#">70-680 Dump PDF VCE</a>	<a href="#">77-604 Dump PDF VCE</a>	<a href="#">MB2-716 Dump PDF VCE</a>
<a href="#">70-417 Dump PDF VCE</a>	<a href="#">70-681 Dump PDF VCE</a>	<a href="#">77-605 Dump PDF VCE</a>	<a href="#">MB2-717 Dump PDF VCE</a>
<a href="#">70-461 Dump PDF VCE</a>	<a href="#">70-682 Dump PDF VCE</a>	<a href="#">77-881 Dump PDF VCE</a>	<a href="#">MB2-718 Dump PDF VCE</a>
<a href="#">70-462 Dump PDF VCE</a>	<a href="#">70-684 Dump PDF VCE</a>	<a href="#">77-882 Dump PDF VCE</a>	<a href="#">MB5-705 Dump PDF VCE</a>
<a href="#">70-463 Dump PDF VCE</a>	<a href="#">70-685 Dump PDF VCE</a>	<a href="#">77-883 Dump PDF VCE</a>	<a href="#">MB6-700 Dump PDF VCE</a>
<a href="#">70-464 Dump PDF VCE</a>	<a href="#">70-686 Dump PDF VCE</a>	<a href="#">77-884 Dump PDF VCE</a>	<a href="#">MB6-701 Dump PDF VCE</a>
<a href="#">70-465 Dump PDF VCE</a>	<a href="#">70-687 Dump PDF VCE</a>	<a href="#">77-885 Dump PDF VCE</a>	<a href="#">MB6-702 Dump PDF VCE</a>
<a href="#">70-466 Dump PDF VCE</a>	<a href="#">70-688 Dump PDF VCE</a>	<a href="#">77-886 Dump PDF VCE</a>	<a href="#">MB6-703 Dump PDF VCE</a>
<a href="#">70-467 Dump PDF VCE</a>	<a href="#">70-689 Dump PDF VCE</a>	<a href="#">77-887 Dump PDF VCE</a>	<a href="#">MB6-704 Dump PDF VCE</a>
<a href="#">70-469 Dump PDF VCE</a>	<a href="#">70-692 Dump PDF VCE</a>	<a href="#">77-888 Dump PDF VCE</a>	<a href="#">MB6-705 Dump PDF VCE</a>
<a href="#">70-470 Dump PDF VCE</a>	<a href="#">70-695 Dump PDF VCE</a>	<a href="#">77-891 Dump PDF VCE</a>	<a href="#">MB6-884 Dump PDF VCE</a>
<a href="#">70-473 Dump PDF VCE</a>	<a href="#">70-696 Dump PDF VCE</a>	<a href="#">98-349 Dump PDF VCE</a>	<a href="#">MB6-885 Dump PDF VCE</a>
<a href="#">70-480 Dump PDF VCE</a>	<a href="#">70-697 Dump PDF VCE</a>	<a href="#">98-361 Dump PDF VCE</a>	<a href="#">MB6-886 Dump PDF VCE</a>
<a href="#">70-481 Dump PDF VCE</a>	<a href="#">70-698 Dump PDF VCE</a>	<a href="#">98-362 Dump PDF VCE</a>	<a href="#">MB6-889 Dump PDF VCE</a>
<a href="#">70-482 Dump PDF VCE</a>	<a href="#">70-734 Dump PDF VCE</a>	<a href="#">98-363 Dump PDF VCE</a>	<a href="#">MB6-890 Dump PDF VCE</a>
<a href="#">70-483 Dump PDF VCE</a>	<a href="#">70-740 Dump PDF VCE</a>	<a href="#">98-364 Dump PDF VCE</a>	<a href="#">MB6-892 Dump PDF VCE</a>
<a href="#">70-484 Dump PDF VCE</a>	<a href="#">70-741 Dump PDF VCE</a>	<a href="#">98-365 Dump PDF VCE</a>	<a href="#">MB6-893 Dump PDF VCE</a>

### Cisco Exams List

<a href="#">010-151 Dump PDF VCE</a>	<a href="#">350-018 Dump PDF VCE</a>	<a href="#">642-737 Dump PDF VCE</a>	<a href="#">650-667 Dump PDF VCE</a>
<a href="#">100-105 Dump PDF VCE</a>	<a href="#">352-001 Dump PDF VCE</a>	<a href="#">642-742 Dump PDF VCE</a>	<a href="#">650-669 Dump PDF VCE</a>
<a href="#">200-001 Dump PDF VCE</a>	<a href="#">400-051 Dump PDF VCE</a>	<a href="#">642-883 Dump PDF VCE</a>	<a href="#">650-752 Dump PDF VCE</a>
<a href="#">200-105 Dump PDF VCE</a>	<a href="#">400-101 Dump PDF VCE</a>	<a href="#">642-885 Dump PDF VCE</a>	<a href="#">650-756 Dump PDF VCE</a>
<a href="#">200-120 Dump PDF VCE</a>	<a href="#">400-151 Dump PDF VCE</a>	<a href="#">642-887 Dump PDF VCE</a>	<a href="#">650-968 Dump PDF VCE</a>
<a href="#">200-125 Dump PDF VCE</a>	<a href="#">400-201 Dump PDF VCE</a>	<a href="#">642-889 Dump PDF VCE</a>	<a href="#">700-001 Dump PDF VCE</a>
<a href="#">200-150 Dump PDF VCE</a>	<a href="#">400-251 Dump PDF VCE</a>	<a href="#">642-980 Dump PDF VCE</a>	<a href="#">700-037 Dump PDF VCE</a>
<a href="#">200-155 Dump PDF VCE</a>	<a href="#">400-351 Dump PDF VCE</a>	<a href="#">642-996 Dump PDF VCE</a>	<a href="#">700-038 Dump PDF VCE</a>
<a href="#">200-310 Dump PDF VCE</a>	<a href="#">500-006 Dump PDF VCE</a>	<a href="#">642-997 Dump PDF VCE</a>	<a href="#">700-039 Dump PDF VCE</a>
<a href="#">200-355 Dump PDF VCE</a>	<a href="#">500-007 Dump PDF VCE</a>	<a href="#">642-998 Dump PDF VCE</a>	<a href="#">700-101 Dump PDF VCE</a>
<a href="#">200-401 Dump PDF VCE</a>	<a href="#">500-051 Dump PDF VCE</a>	<a href="#">642-999 Dump PDF VCE</a>	<a href="#">700-104 Dump PDF VCE</a>
<a href="#">200-601 Dump PDF VCE</a>	<a href="#">500-052 Dump PDF VCE</a>	<a href="#">644-066 Dump PDF VCE</a>	<a href="#">700-201 Dump PDF VCE</a>
<a href="#">210-060 Dump PDF VCE</a>	<a href="#">500-170 Dump PDF VCE</a>	<a href="#">644-068 Dump PDF VCE</a>	<a href="#">700-205 Dump PDF VCE</a>
<a href="#">210-065 Dump PDF VCE</a>	<a href="#">500-201 Dump PDF VCE</a>	<a href="#">644-906 Dump PDF VCE</a>	<a href="#">700-260 Dump PDF VCE</a>
<a href="#">210-250 Dump PDF VCE</a>	<a href="#">500-202 Dump PDF VCE</a>	<a href="#">646-048 Dump PDF VCE</a>	<a href="#">700-270 Dump PDF VCE</a>
<a href="#">210-255 Dump PDF VCE</a>	<a href="#">500-254 Dump PDF VCE</a>	<a href="#">646-365 Dump PDF VCE</a>	<a href="#">700-280 Dump PDF VCE</a>
<a href="#">210-260 Dump PDF VCE</a>	<a href="#">500-258 Dump PDF VCE</a>	<a href="#">646-580 Dump PDF VCE</a>	<a href="#">700-281 Dump PDF VCE</a>
<a href="#">210-451 Dump PDF VCE</a>	<a href="#">500-260 Dump PDF VCE</a>	<a href="#">646-671 Dump PDF VCE</a>	<a href="#">700-295 Dump PDF VCE</a>
<a href="#">210-455 Dump PDF VCE</a>	<a href="#">500-265 Dump PDF VCE</a>	<a href="#">646-985 Dump PDF VCE</a>	<a href="#">700-501 Dump PDF VCE</a>
<a href="#">300-070 Dump PDF VCE</a>	<a href="#">500-275 Dump PDF VCE</a>	<a href="#">648-232 Dump PDF VCE</a>	<a href="#">700-505 Dump PDF VCE</a>
<a href="#">300-075 Dump PDF VCE</a>	<a href="#">500-280 Dump PDF VCE</a>	<a href="#">648-238 Dump PDF VCE</a>	<a href="#">700-601 Dump PDF VCE</a>
<a href="#">300-080 Dump PDF VCE</a>	<a href="#">500-285 Dump PDF VCE</a>	<a href="#">648-244 Dump PDF VCE</a>	<a href="#">700-602 Dump PDF VCE</a>
<a href="#">300-085 Dump PDF VCE</a>	<a href="#">500-290 Dump PDF VCE</a>	<a href="#">648-247 Dump PDF VCE</a>	<a href="#">700-603 Dump PDF VCE</a>
<a href="#">300-101 Dump PDF VCE</a>	<a href="#">500-801 Dump PDF VCE</a>	<a href="#">648-375 Dump PDF VCE</a>	<a href="#">700-701 Dump PDF VCE</a>
<a href="#">300-115 Dump PDF VCE</a>	<a href="#">600-199 Dump PDF VCE</a>	<a href="#">648-385 Dump PDF VCE</a>	<a href="#">700-702 Dump PDF VCE</a>
<a href="#">300-135 Dump PDF VCE</a>	<a href="#">600-210 Dump PDF VCE</a>	<a href="#">650-032 Dump PDF VCE</a>	<a href="#">700-703 Dump PDF VCE</a>
<a href="#">300-160 Dump PDF VCE</a>	<a href="#">600-211 Dump PDF VCE</a>	<a href="#">650-042 Dump PDF VCE</a>	<a href="#">700-801 Dump PDF VCE</a>
<a href="#">300-165 Dump PDF VCE</a>	<a href="#">600-212 Dump PDF VCE</a>	<a href="#">650-059 Dump PDF VCE</a>	<a href="#">700-802 Dump PDF VCE</a>
<a href="#">300-180 Dump PDF VCE</a>	<a href="#">600-455 Dump PDF VCE</a>	<a href="#">650-082 Dump PDF VCE</a>	<a href="#">700-803 Dump PDF VCE</a>
<a href="#">300-206 Dump PDF VCE</a>	<a href="#">600-460 Dump PDF VCE</a>	<a href="#">650-127 Dump PDF VCE</a>	<a href="#">810-403 Dump PDF VCE</a>
<a href="#">300-207 Dump PDF VCE</a>	<a href="#">600-501 Dump PDF VCE</a>	<a href="#">650-128 Dump PDF VCE</a>	<a href="#">820-424 Dump PDF VCE</a>
<a href="#">300-208 Dump PDF VCE</a>	<a href="#">600-502 Dump PDF VCE</a>	<a href="#">650-148 Dump PDF VCE</a>	<a href="#">840-425 Dump PDF VCE</a>
<a href="#">300-209 Dump PDF VCE</a>	<a href="#">600-503 Dump PDF VCE</a>	<a href="#">650-159 Dump PDF VCE</a>	
<a href="#">300-210 Dump PDF VCE</a>	<a href="#">600-504 Dump PDF VCE</a>	<a href="#">650-281 Dump PDF VCE</a>	
<a href="#">300-320 Dump PDF VCE</a>	<a href="#">640-692 Dump PDF VCE</a>	<a href="#">650-393 Dump PDF VCE</a>	
<a href="#">300-360 Dump PDF VCE</a>	<a href="#">640-875 Dump PDF VCE</a>	<a href="#">650-472 Dump PDF VCE</a>	
<a href="#">300-365 Dump PDF VCE</a>	<a href="#">640-878 Dump PDF VCE</a>	<a href="#">650-474 Dump PDF VCE</a>	
<a href="#">300-370 Dump PDF VCE</a>	<a href="#">640-911 Dump PDF VCE</a>	<a href="#">650-575 Dump PDF VCE</a>	
<a href="#">300-375 Dump PDF VCE</a>	<a href="#">640-916 Dump PDF VCE</a>	<a href="#">650-621 Dump PDF VCE</a>	
<a href="#">300-465 Dump PDF VCE</a>	<a href="#">642-035 Dump PDF VCE</a>	<a href="#">650-663 Dump PDF VCE</a>	
<a href="#">300-470 Dump PDF VCE</a>	<a href="#">642-732 Dump PDF VCE</a>	<a href="#">650-665 Dump PDF VCE</a>	
<a href="#">300-475 Dump PDF VCE</a>	<a href="#">642-747 Dump PDF VCE</a>	<a href="#">650-754 Dump PDF VCE</a>	

## HOT EXAMS

### Cisco

[100-105 Dumps VCE PDF](#)  
[200-105 Dumps VCE PDF](#)  
[300-101 Dumps VCE PDF](#)  
[300-115 Dumps VCE PDF](#)  
[300-135 Dumps VCE PDF](#)  
[300-320 Dumps VCE PDF](#)  
[400-101 Dumps VCE PDF](#)  
[640-911 Dumps VCE PDF](#)  
[640-916 Dumps VCE PDF](#)

### Microsoft

[70-410 Dumps VCE PDF](#)  
[70-411 Dumps VCE PDF](#)  
[70-412 Dumps VCE PDF](#)  
[70-413 Dumps VCE PDF](#)  
[70-414 Dumps VCE PDF](#)  
[70-417 Dumps VCE PDF](#)  
[70-461 Dumps VCE PDF](#)  
[70-462 Dumps VCE PDF](#)  
[70-463 Dumps VCE PDF](#)  
[70-464 Dumps VCE PDF](#)  
[70-465 Dumps VCE PDF](#)  
[70-480 Dumps VCE PDF](#)  
[70-483 Dumps VCE PDF](#)  
[70-486 Dumps VCE PDF](#)  
[70-487 Dumps VCE PDF](#)

### CompTIA

[220-901 Dumps VCE PDF](#)  
[220-902 Dumps VCE PDF](#)  
[N10-006 Dumps VCE PDF](#)  
[SY0-401 Dumps VCE PDF](#)